


**Tools Required:**

- 3mm hex key
- Standard medium screw driver
- Phillips screw driver



**Dimensions**

- A:** 4-3/4 "
- B:** 4-3/4 "
- C:** 2-3/4 "



**Protection Class:** IP65


**Weight:** 1.5 lbs.

**Notice to Installer for 22 228:**

1. No relamping required.
2. In conformance with UL Standard 1598, a silicone based sealant must be used between fixture and supporting wall.
3. Requires a 24V DC class 2 electronic power supply to operate intended LED wattage.

**22 228 Installation:**

1. Loosen the (3) M4 socket head screws on the luminaire top and remove top from the luminaire base.
2. Loosen the (2) M4 socket head screws on the base to remove the electrical plate from the base. However, keep the luminaire wiring routed through the wireway of the luminaire base.
3. Attach the adaptor ring from the mounting kit to a 3-1/2" or 4" octagonal wiring box using the (2) wiring box screws.
4. Make supply wiring and luminaire wiring connections inside the wiring box.  
 NEGATIVE SUPPLY WIRE TO BLACK LUMINAIRE WIRE  
 POSITIVE SUPPLY WIRE TO RED LUMINAIRE WIRE
5. Test to make sure the luminaire base will be level when installed by aligning the mounting holes on the luminaire base with the holes in the adaptor ring. Adjust the adaptor ring if needed.
6. Place a small bead of silicone around the back side of the luminaire flange that will come in contact with the finished wall (exterior applications only).
7. Secure the luminaire base to the adaptor ring and finished wall by using the (2) countersunk screws provided.
8. Replace electrical plate.
9. Replace luminaire top and tighten screws evenly

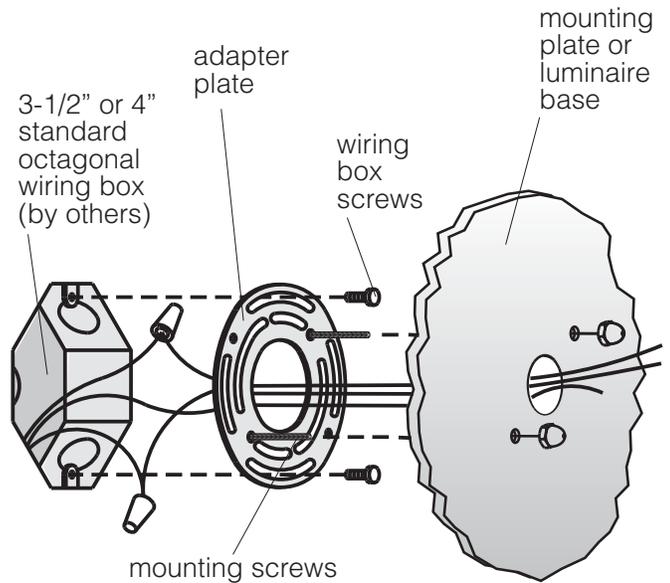

**Relamping/Maintenance**

Disassemble faceplate. Clean dirt and deposits from the luminaire and glass using only solvent-free cleaners. Relamp and replace gasket if damaged. Reassemble faceplate.

**Accessories**

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

- Remote 25W LED driver and box 19 580
- Remote 50W LED driver and box 19 591

**Replacement Parts**

Description	Part No
Faceplate	FP2228
Gasket	831032
LED Driver (24V DC)	75928
LED Module (3000K)	74038
LED Module (4000K)	74043

**Lamp:** 3.0W LED 24V DC

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

**Product Safety Warnings:**

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.**

**MIN 60°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.**

**LES FILS D'ALIMENTATION 60°C MIN.**

---