
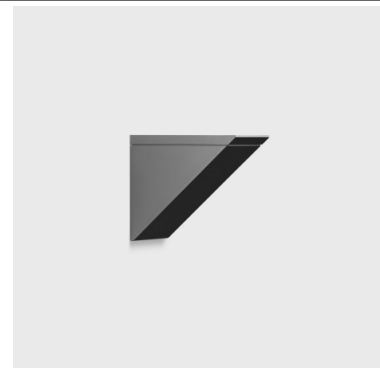


**Tools Required:**

3mm hex key  
 4mm hex key  
 11/32" Nut driver  
 Phillips medium screwdriver


**Dimensions**
**A:** 10-1/4 "

**B:** 8-1/2 "

**C:** 9-5/8 "

**Protection Class:** IP65

**Weight:** 11.46 lbs.

**Notice to Installer for 22 458:**

1. See page 2 for specific product safety warnings.
2. Mounts directly to standard recessed 4" octagonal wiring box (by others), using luminaire mounting plate.
3. In conformance with UL Standard 1598, a silicone based sealant must be used between luminaire and supporting wall.
4. Integral LED module and LED driver supplied by BEGA.

**22 458 - installation:**

1. Loosen screw at luminaire canopy and remove luminaire mounting plate.
  2. Install (2) long 8-32 x 1 1/2" screws (provided) in the back of the mounting plate.
  3. Attach mounting plate to wiring box using (2) 8-32 x 1/2" screws provided.  
Feed luminaire wires through the plate.
  4. Make supply wiring and luminaire wiring connections in the octagonal wiring box:
    - MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
    - NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
    - GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
- Dimming (if applicable):**
- DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER WIRE
  - DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER WIRE
5. Note orientation labels on luminaire mounting plate. Test to make sure the mounting plate is level.
  6. Place a small bead of silicone around the back side of the mounting base and luminaire that will come in contact with the finished wall (exterior applications only).
  7. Tighten the nuts to back the screws into the wiring box and secure the plate to the box.
  8. Mount luminaire to mounting plate and tighten canopy screw to secure luminaire, making sure orientation label is aimed correctly.

**Relamping/Maintenance**

No relamping necessary.

**Accessories**

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

**Replacement Parts**

Description	Part No
Lens	140278
Lens gasket	830655
LED driver (120-277V)	75945
LED Module 3000K	LED-0496/830
LED Module 4000K	LED-0496/840

**Lamp:** 50.4W LED

## Product Safety Warnings:

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.**

**MIN 60°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.**

**LES FILS D'ALIMENTATION 60°C MIN.**

---