

**Tools Required:**

- 4mm hex head screwdriver
- Philips medium screwdriver
- Adjustable wrench



**Dimensions**

- A:** 13-3/4"
- B:** 6-3/4"



**Protection Class:** IP65

**Weight:** 12.6 lbs.

**Notice to Installer for 22 467:**

1. **BEGA luminaires may be damaged if connected to conduit systems containing water - Article 300-5G of National Electric Code requires that "Conduits or raceways through which moisture may contact energized live parts shall be sealed or plugged at either or both ends".**
2. Luminaire mounts *directly to wall* OVER recessed standard octagonal 4" wiring box (by others) using hardware by others.  
NOTE: Luminaire does NOT mount directly to wiring box. Luminaire base plate will anchor directly into wall surface - see figure.

**IMPORTANT NOTE:**

In conformance with U.L. Standards 1598, a silicone-based sealant **MUST** be used between the mounting plate edge and supporting wall.


LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation.

**22 467 - installation:**

1. Unscrew (3) trim screws and remove trim and glass lens.
2. Make supply wiring and luminaire wiring connections in the octagonal wiring box:  
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE  
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE  
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE

**Dimming (if applicable):**

- DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
  - DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
3. Place a small bead of silicone around the back side of the luminaire base that will come in contact with the finished wall (exterior applications only).
  4. Anchor luminaire base to wall surface using hardware by others. See figure for mounting hole spacing.
  5. Replace lens, gasket and trim. Tighten (3) hex screws to secure, making sure that the gasket is seated properly.

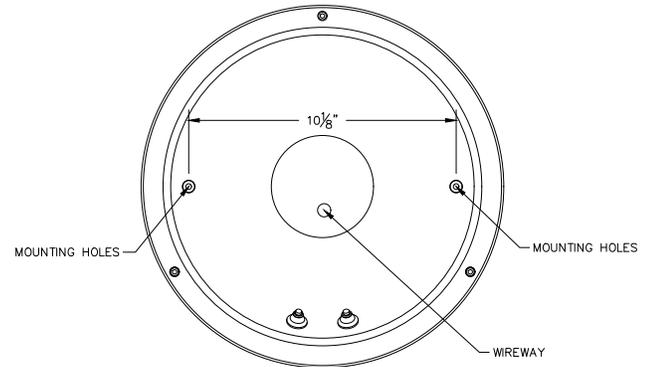

**Relamping/Maintenance**

Clean regularly with solvent-free cleansers.  
Do not use high pressure cleaners.

**Accessories**

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

**Replacement Parts**

Description	Part No
Diffuser	11236411
Gasket	830411
LED Driver (120-277V)	75958-09
LED Module (3000K)	LED-0510/930
LED Module (4000K)	LED-0510/930

Lamp: 26.9W LED

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

**Product Safety Warnings:**

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.**

**MIN 90°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.**

**LES FILS D'ALIMENTATION 90°C MIN.**

---