


Tools Required:

- 3mm hex key
- 4mm hex key
- 11/32" Nut driver
- Phillips medium screwdriver



Dimensions

- A: 8-1/4"
- B: 8-1/4"
- C: 3-1/4"



Protection Class: IP65


Weight: 4.4 lbs.

Notice to Installer for 22 665:

- Mounts directly to a standard recessed 3-1/2" or 4" wiring box (by others) using mounting kit (supplied).
- In conformance with UL Standard 1598, a silicone based sealant must be used between luminaire and supporting wall.
- For downwards/downlight orientation only (exterior applications).

22 665 - Installation:

- Loosen (4) 4mm housing hex screws and remove outer casting with lens attached.
- Install (2) long 8-32 x 1 1/2" mounting screws (provided) in the back of the adapter plate as shown.
- Attach adapter plate to wiring box using (2) 8-32 x 1/2" screws provided. Feed luminaire wires through luminaire base and adapter plate.
- Make supply wiring and luminaire wiring connections in the wiring box:  
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE  
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
- Place a small bead of silicone around the back side of the luminaire base that will come in contact with the finished wall (exterior applications only).
- Attach luminaire base to adapter plate over the mounting screw using the (2) acorn nuts provided in the mounting kit. Tighten the nuts to back the screws into the wiring box and secure the plate to the box.  
IMPORTANT: note position of orientation arrow on mounting plate and install accordingly.
- Insert lamp (by others).
- Replace outer casting and tighten (4) housing screws, making sure the gasket is seated properly.

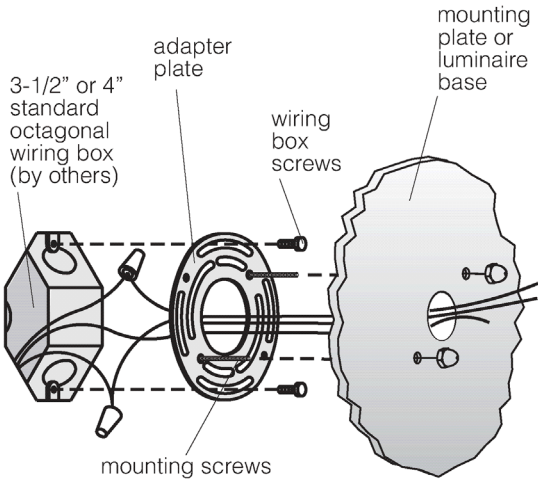

Relamping/Maintenance

No relamping required.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

Description	Part No
Lens	11275011
Gasket	830532.1
LED driver (120-277V)	76023
LED module (3000K)	LED-0263/830
LED module (4000K)	LED-0263/840

Lamp: 3.9W LED Module

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

## Product Safety Warnings:

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.**

**MIN 90°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.**

**LES FILS D'ALIMENTATION 90°C MIN.**

---