


Tools Required:

- 3mm hex key
- 11/32" Nut driver
- Philips medium screwdriver
- Medium slotted screwdriver



Dimensions

- A: 5 "
- B: 8-1/2 "
- C: 4-1/4 "



Protection Class: IP65

Weight: 3.5 lbs.

Notice to Installer for 22 750:

- Mounts directly to standard recessed 4" octagonal wiring box (by others), using mounting kit (supplied).
- In conformance with UL Standard 1598, a silicone based sealant must be used between luminaire and supporting wall.

IMPORTANT NOTE:

In conformance with U.L. Standards 1598, a silicone-based sealant MUST be used between the mounting plate edge and supporting wall.

LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation.


22 750 - installation:

- Unscrew (2) 3mm hex trim screws and remove trim and glass lens.
- Install (2) long 8-32 x 1 1/2" mounting screws (provided) in the back of the adapter plate as shown.
- Attach adapter plate to wiring box using (2) 8-32 x 1/2" screws provided. Feed luminaire wires through luminaire base and adapter plate.
- Make supply wiring and luminaire wiring connections in the octagonal wiring box:
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE

Dimming (if applicable):

- DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
- DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE

- Place a small bead of silicone around the back side of the luminaire base that will come in contact with the finished wall (exterior applications only).
- Attach luminaire base to adapter plate over the mounting screws using the (2) acorn nuts provided in the mounting kit. Tighten the nuts to back the screws into the wiring box and secure the plate to the box.
- Replace trim and glass lens and tighten (2) screws, making sure gasket is seated properly.

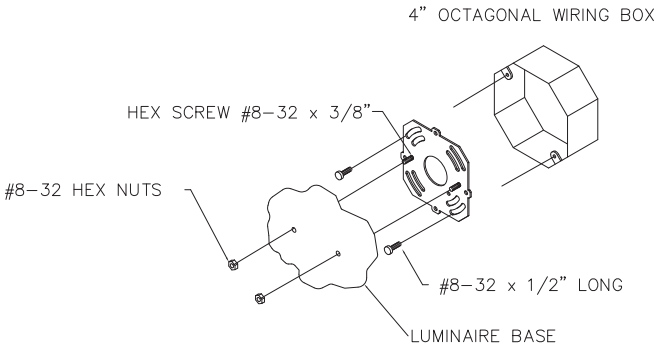

Relamping/Maintenance

Loosen screws and remove trim and lens. Clean luminaire and lens using only solvent-free cleansers. Replace lens and trim and tighten screws evenly, making sure that the gasket is seated properly.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

Description	Part No
Lens	11249011
Lens gasket	830531
LED Driver (120V-277V)	76023
LED Module (3000K)	LED-0263/930
LED Module (4000K)	LED-0263/940

Lamp: 3.9W LED

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.

MIN 60°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 60°C MIN.
