


**Tools Required:**

4mm hex key  
Phillips head medium screwdriver  
Standard medium screwdriver

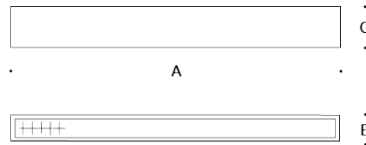

**Dimensions**

**A:** 20-1/2"  
**B:** 2-3/8"  
**C:** 3-3/4"




**Protection Class:** IP65

**Weight:** 6.39 lbs.


**Notice to Installer for 24 315:**

1. **BEGA luminaires may be damaged if connected to conduit systems containing water- Article 300-5G of National Electric Code requires that "Conduits or raceways through which moisture may contact energized live parts shall be sealed or plugged at either or both ends".**
2. Mounts directly to ceiling OVER 19 537 narrow opening wiring box (provided)
3. In conformance with U.L. Standards 1598, a silicone-based sealant **MUST** be used between the mounting plate edge and supporting wall.
4. Level mounting surface is necessary to have complete seal around luminaire.
5. LEDs are high-quality electronic components!  
Please avoid touching the light output opening of the LED directly during installation
6. Ceiling applications only.

**Figure 1:**

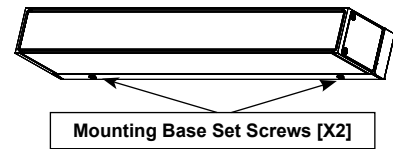


**Figure 2: (Generic Image)**

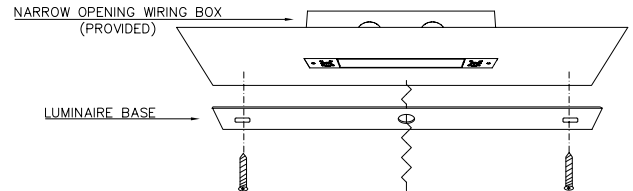

**24 315 - Installation:**

1. Loosen (2X) M3 set screws on bottom of fixture to remove luminaire mounting base
2. Route wires through luminaire base into narrow opening wiring box.
3. Make supply wiring and luminaire wiring connections inside the narrow opening wiring box:  
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE  
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE  
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE  
0-10V DIMMING (if applicable):  
DIMMING CONTROL WIRE (+) TO POSITIVE LUMINAIRE DIM CONTROL WIRE  
DIMMING CONTROL WIRE (-) TO NEGATIVE LUMINAIRE DIM CONTROL WIRE
4. Mount luminaire base directly to finished ceiling, over narrow opening wiring box. Using appropriate mounting hardware (by others). Minimum size: 8-32 screws.
5. Place a small bead of silicone around the back side of the luminaire base that will come in contact with the finished surface. (Exterior applications only)
6. Re-attach luminaire housing to luminaire baseplate and tighten (2X) M3 set screws to secure. Do not over tighten.

**Figure 3:**

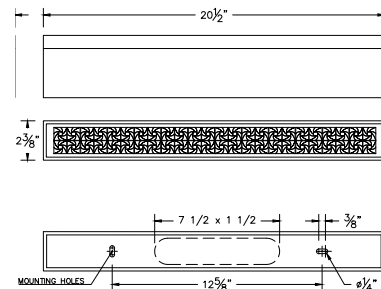

**Relamping/Maintenance**

Clean regularly with solvent-free cleansers.  
Do not use high pressure cleaners.

**Accessories**

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

**Replacement Parts**

Description	Part No
LED Driver (120-277V)	(1X) 76142-01
LED Module (2700K)	(2X) LED-0771/827
LED Module (3000K)	(2X) LED-0771/830
LED Module (3500K)	(2X) LED-0771/835
LED Module (4000K)	(2X) LED-0771/840

**Lamp:** 16W LED

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

**Product Safety Warnings:**

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.**

**MIN 90°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.**

**LES FILS D'ALIMENTATION 90°C MIN.**

---