

**Tools Required:**

- 4mm hex head screwdriver
- Adjustable wrench

**Overview:**


LED Watts: 12.6W  
 System Watts: 17.0W  
 Controllability: 0-10V, TRIAC, and ELV dimmable  
 Weight: 9.5 lbs.  
 Protection Class: IP66

**Notice to Installer:**

1. See page 2 for specific product safety warnings.
2. For wall applications only.
3. Mounts directly to standard recessed 4" octagonal wiring box (by others), using provided mounting kit. (Kit #3)
4. Silicone based sealant must be used between luminaire and supporting wall, [In conformance with UL Standard 1598]
5. Fixture should not be opened during installation.

**Luminaire 24 350 installation:**

1. Using the mounting kit provided, install the (2) longer screws through the back of the mounting adapter plate facing the luminaire. (Figure 1)
2. Install the (2) shorter screws through the front of the adapter plate using the outer slotted regions of the adapter plate to mount directly to recessed wiring box. (Figure 1)
3. Route supply wiring through center of adapter plate.
4. To adjust beam direction (up to 15 degrees), loosen hex nut and adjust joint (Figure 2) ensuring position is secured. BE CAREFUL AS THE FIXTURE WILL DROP QUICKLY UPON LOOSENING.
5. Pull wiring from fixture to make connections with supply wiring.
6. Make supply wiring and luminaire wiring connections inside recessed backbox:
  - MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
  - NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
  - GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
- Dimming (if applicable):
  - DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
  - DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
7. Loosen set screw at the base of the luminaire to release the mounting base of the luminaire.
8. Align luminaire mounting base with the longer screws/adapter plate.
9. Thread provided (2) acorn nuts provided in mounting kit to secure mounting base to wiring box. Provide silicone sealant where mounting base and supporting wall meet.
10. Place luminaire over mounting base and tighten canopy set screw to secure luminaire to mounting base, making sure orientation label is aimed correctly.




**Dimensions**


A: 10"  
 B: 2-3/8"  
 C: 16-1/8"  
 D: 5-1/4"



**Figure 1**

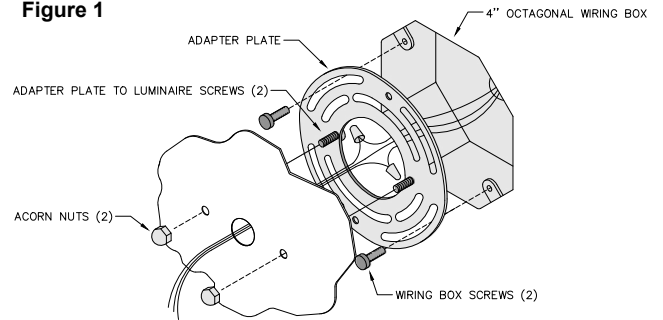

**Figure 2**

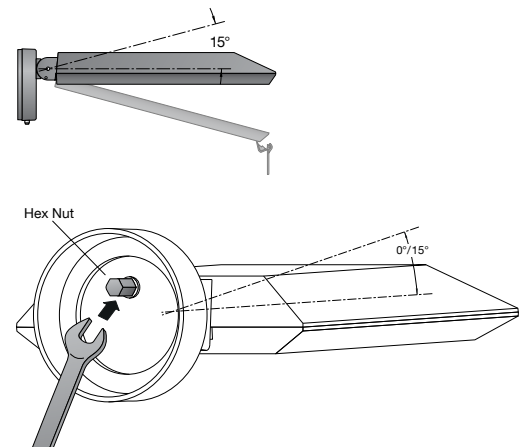

**Luminaire Accessories**

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

**Mounting Accessories**

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

**Maintenance:**

Clean regularly with solvent-free cleaner removing dirt and debris. Do not use high pressure cleaners.

**Replacement Parts**

See label inside of fixture for LED replacement part number.

Consult factory for all other replacement components.

**Product Safety Warnings:**

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.  
SUITABLE FOR WET LOCATIONS.  
MIN 60°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.  
CONVIENT AUX EMPLACEMENTS MOUILLÉS.  
LES FILS D'ALIMENTATION 60°C MIN.**