


Tools Required:

- Flat head screwdriver
- Phillips head screwdriver



Dimensions

A: 3-7/8

B: 4-3/8



Overview:

LED Watts: 8.0W
 System Watts: 12.0W
 Controllability: 0-10V dimmable
 Weight: 1.65 lbs.
 Protection Class: IP65

Notice to Installer:

1. BEGA luminaires may be damaged if connected to conduit systems containing water. Article 300-5G of National Electric Code requires that "Conduits or raceways through which moisture may contact energized live parts shall be sealed or plugged at either or both ends"
2. Fixture mounts directly to 19 538 small opening wiring box (provided).
3. In order to maintain wet location listing, fixture must be used with finished ceiling construction. Do not install in open ceilings, corrugated ceilings, exposed beams, or in any installation where the top of the fixture is exposed to the elements.
4. In conformance with U.L. Standards 1598, a silicone-based sealant **MUST** be used between the mounting plate edge and supporting wall.

19538 Wiring Box Installation:

1. BEGA small opening wiring box intended for use with BEGA luminaires that can not be installed over a standard wiring box. Please note a 3-1/4" opening size in finished surface is required for proper installation. Round opening must be flush with the finished surface.
2. **For stud ceiling installation:** Install mounting brackets (included) into 19538 wiring box using hardware (included) and then secure mounting brackets to stud using appropriate hardware by others.
3. **For concrete installations:** Attach mounting bracket to box using hardware provided. Attach wiring box to concrete form ensuring round opening of box will be flush with the finished surface.
4. Make conduit connection to wiring box and pull supply wire for connections to be made later. Wiring box provided includes (4) 1/2" trade size conduit openings.
5. Finish ceiling.

Luminaire 24425 Installation:

1. BEGA 19538 small opening wiring box comes with a cross-shaped mounting bracket. This mounting bracket is not needed to install luminaire 24425. The luminaire will mount directly to the box using Kit #97 (included) See Figure 3.
2. Detach mounting plate from fixture by turning it counter-clockwise.
3. Disconnect the quick-connect between the LED and driver.
4. Make supply wiring and LED driver connections in 19 538 small opening wiring box:
 MAIN VOLTAGE SUPPLY WIRE TO BLACK LED DRIVER WIRE
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LED DRIVER WIRE
 GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
 0-10V Dimming (if applicable):
 DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
 DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
5. Use the (2) flat head screws provided with the wiring box to attach the mounting bracket directly to the box.
6. Set mounting plate over the center screw in the mounting kit bracket. Aim the mounting plate per desired fixture orientation and secure into place by tightening the center nut.
7. Connect quick connect between LED and driver and replace fixture. Turn clockwise to lock into place. Use caution and watch for pinched wires.
8. Place a small bead of silicone between the mounting plate and the finished surface (exterior applications only).

Figure 1:

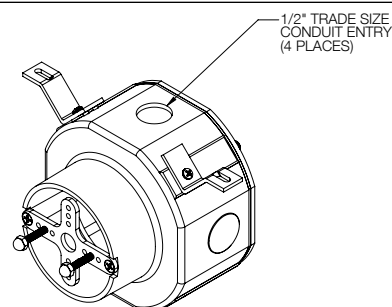


Figure 2:


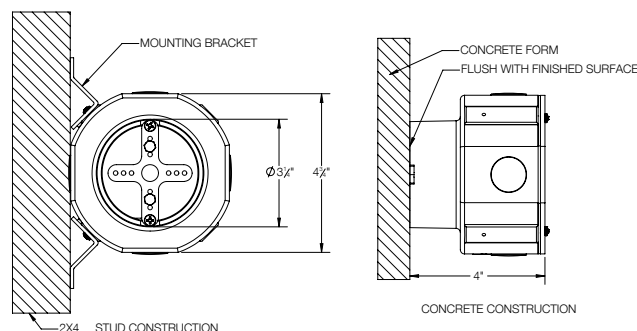


Figure 3:

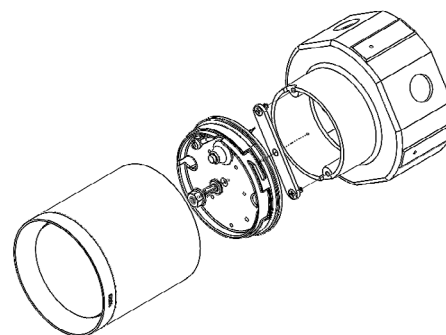

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Maintenance:

Clean regularly with solvent-free cleaner removing dirt and debris. Do not use high pressure cleaners.

Replacement Parts

See label inside of fixture for LED replacement part number.

Consult factory for all other replacement components.

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS. SUITABLE FOR MOUNTING WITHIN 1.2 m (4 ft) OF THE GROUND MIN 60°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS. PEUT ÊTRE INSTALLÉ À MOINS DE 1,2 m (4 pi) DU SOL LES FILS D'ALIMENTATION 60°C MIN.