


Tools Required:

- 3mm hex key
- 11/32" Nut driver
- Phillips medium screwdriver



- Dimensions**
- A: 4-3/8"
 - B: 7-1/2"
 - C: 4-3/4"




Protection Class: IP64

Weight: 2.2 lb.

- Notice to Installer for 24 502:**
- Mounts directly to a standard 4" octagonal recessed wiring box (by others) using adapter plate (supplied).
 - In conformance with UL Standard 1598, a silicone based sealant must be used between luminaire and supporting wall.
 - LEDs are high-quality electronic components! Please avoid touching them directly during installation.

- 24 502 - installation:**
- Loosen (2) 3mm set screws under luminaire and remove outer casting with lens.
 - Feed luminaire wires through luminaire base and adapter plate.
 - Make supply wiring and luminaire wiring connections in the wiring box:
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
- Dimming (if applicable):**
- DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
 - DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
- Place a bead of silicone RTV around the outer edge of the back side of the adaptor plate that will come in contact with the finished wall (exterior applications only).
 - Attach adaptor plate to wiring box using (2) 8-32 x 1/2" screws provided. Choose screw slots based on wiring box such that fixture will mount straight, with lens pointing downward.
 - Apply silicone RTV to outside edge of luminaire base and mount luminaire base over the mounting studs in adaptor plate. Tighten nuts (provided) to secure base.

Figure 1

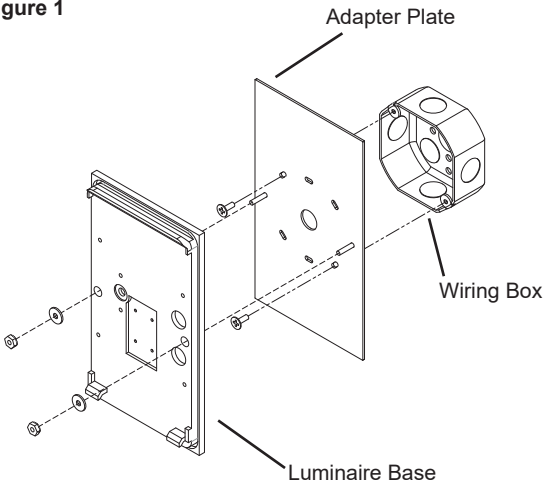

IMPORTANT: note position of orientation arrow on mounting plate and install accordingly.

- Replace outer casting and tighten (2) set screws, making sure the gasket is seated properly.

Relamping/Maintenance

Clean luminaire regularly with solvent-free cleansers. Do not use high pressure cleaners.

Lamp: 14W LED

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts	
Description	Part No
Faceplate Assembly	FP24502
LED driver (120-277V)	76059
LED module (3000K)	LED-0736/830
LED module (4000K)	LED-0736/840

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.