


**Tools Required:**

- Medium phillips head screwdriver
- 3mm hex head screwdriver
- T20 torx head screwdriver

**Overview:**


LED Watts: 16.8W  
 System Watts: 20.0W  
 Controllability: 0-10V, TRIAC, and ELV dimmable  
 Weight: 2.8 lbs.  
 Protection Class: IP65



**Dimensions**

A: 5-1/8"

B: 5-1/4"




**Notice to Installer:**

1. BEGA luminaires may be damaged if connected to conduit systems containing water- Article 300-5G of National Electric Code requires that "Conduits or raceways through which moisture may contact energized live parts shall be sealed or plugged at either or both ends"
2. Fixture mounts directly to recessed 4" octagonal wiring box (provided).
3. In order to maintain wet location listing, fixture must be used with finished ceiling construction. Do not install in open ceilings, corrugated ceilings, exposed beams, or in any installation where the top of the fixture is exposed to the elements.
4. In conformance with U.L. Standards 1598, a silicone-based sealant **MUST** be used between the mounting plate edge and supporting wall.

**Luminaire 24527 Installation:**

1. Detach the casting from the luminaire by loosening the 3mm set screw on the main luminaire housing making sure that the driver wires are still routed
2. Attach the plate from the mounting kit to the recessed 4" octagonal wiring box (by others) using the (2) philips head screws provided (Figure 1). through the wireway.
3. Make supply wiring and luminaire wiring connections inside the recessed 4" octagonal wiring box:  
 MAIN VOLTAGE SUPPLY WIRE TO BLACK DRIVER WIRE  
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE DRIVER WIRE  
 GREEN GROUND WIRE TO LUMINAIRE GREEN GROUND WIRE  
 0-10V Dimming, DALI (if applicable):  
 DIMMING CONTROL WIRE (+) TO PURPLE DRIVER DIM CONTROL WIRE  
 DIMMING CONTROL WIRE (-) TO GREY DRIVER DIM CONTROL WIRE
4. Place a small bead of silicone sealant around the round wall mount casting where it will contact the mounting surface.
5. Attach round casting to the mounting kit using the (2) T20 torx screws provided making sure silicone sealant is present where the casting meets the mounting surface (Figure 1).
6. Place the main luminaire housing over the round wall mount casting, rotate to desired position, and secure in place by tightening the 3mm set screw.

**Figure 1:**

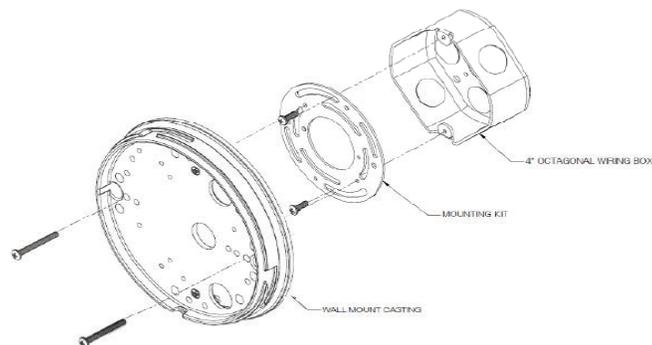

**Accessories**

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

**Maintenance:**

Clean regularly with solvent-free cleaner removing dirt and debris. Do not use high pressure cleaners.

**Replacement Parts**

See label inside of fixture for LED replacement part number.

Consult factory for all other replacement components.

**Product Safety Warnings:**

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS. SUITABLE FOR MOUNTING WITHIN 1.2 m (4 ft) OF THE GROUND MIN 60°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS. PEUT ÊTRE INSTALLÉ À MOINS DE 1,2 m (4 pi) DU SOL LES FILS D'ALIMENTATION 60°C MIN.**