


Tools Required:

3mm hex key
 11/32" Nut driver
 Philips medium screwdriver
 Medium slotted screwdriver


Dimensions

A: 6 3/8"
B: 11 3/8"
C: 4 1/2"



Protection Class: IP65

Weight: 6.2 lbs.

Notice to Installer for 24 601:

1. Mounts directly to standard recessed 4" octagonal wiring box (by others), using mounting kit (supplied).

IMPORTANT NOTE:

In conformance with U.L. Standards 1598, a silicone-based sealant **MUST** be used between the mounting plate edge and supporting wall.


LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation.

24 601 - Installation:

1. Unscrew (2) 3mm hex trim screws and remove trim and glass lens.
2. Install (2) long 8-32 x 1 1/2" mounting screws (provided) in the back of the adapter plate as shown.
3. Attach adapter plate to wiring box using (2) 8-32 x 1/2" screws provided. Feed luminaire wires through luminaire base and adapter plate.
4. Make supply wiring and luminaire wiring connections in the octagonal wiring box:
 MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
 GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE

Dimming (if applicable):

- DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
 DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
5. Place a small bead of silicone around the back side of the luminaire base that will come in contact with the finished wall (exterior applications only).
 6. Attach luminaire base to adapter plate over the mounting screws using the (2) acorn nuts provided in the mounting kit. Tighten the nuts to back the screws into the wiring box and secure the plate to the box.
 7. Replace trim and glass lens and tighten (2) screws, making sure gasket is seated properly.

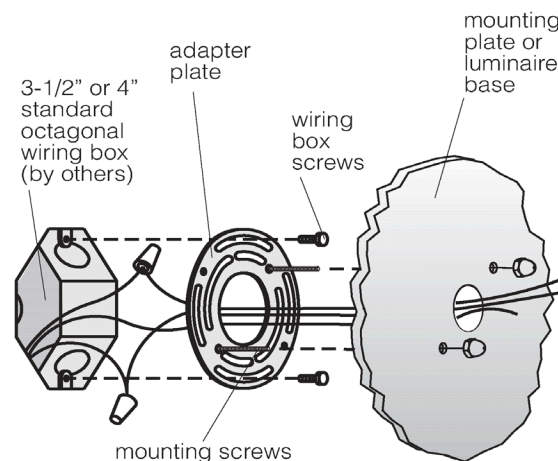
Relamping/Maintenance

Loosen screws and remove trim and lens. Clean luminaire and lens using only solvent-free cleansers. Replace lens and trim and tighten screws evenly, making sure that the gasket is seated properly.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

| Description | Part No |
|-----------------------|--------------|
| Lens | 11249111 |
| Lens gasket | 830533.1 |
| LED driver (120-277V) | 75992 |
| LED replacement 3000K | LED-0262/930 |
| LED replacement 4000K | LED-0262/940 |

Lamp: 9.7W LED

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.

MIN 60°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 60°C MIN.
