


Tools Required:

Phillips medium screwdriver  
3mm hex head screwdriver



Dimensions

A: 7-1/2 "  
B: 6-1/2 "  
C: 7-4/8 "  
D: 3-1/2 "



Protection Class: IP44

Weight: 2.9 lbs.

Notice to Installer for 31 058:

- 1. See page 2 for specific product safety warnings.
- 2. For wall applications only.
- 3. Mounts directly to a standard recessed 4" octagonal wiring box (by others) using adaptor plate (provided).
- 4. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- 5. In conformance with UL Standard 1598, a silicone based sealant must be used between luminaire and supporting wall.

NOTE: LEDs are high-quality electronic components! Please avoid touching them directly during installation.


NOTE: To avoid fingerprints on the luminaire use enclosed protective gloves during installation. The luminaire parts made of solid copper are delivered with the metal's natural surface color. Time and weather factors create the natural patina characteristic for copper.

31 058 - installation:

- 1. Undo set screw at wall box and remove mounting plate.
- 2. Install (2) long 8-32 x 1-1/2" mounting screws (provided) in the back of the adaptor plate as shown.
- 3. Attached adaptor plate to wiring box using (2) 8-32 x 1/2" screws provided. Feed luminaire wires through mounting plate, j-box decorative cover, and adaptor plate.
- 4. Make supply wiring connections inside the wiring box:  
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE  
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE  
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE

Dimming (if applicable):

- DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE  
DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
- 5. Attach mounting plate to adaptor plate over the mounting screws using the (2) acorn-nuts provided in the mounting kit. Ensure that the j-box decorative cover is placed between the mounting plate and the adaptor plate (see figure). Tighten the nuts to back the screws into the wiring box and secure the plate to the box.
- 6. Place a small bead of silicone around the back side of the luminaire base that will come in contact with the finished wall (exterior applications only).
- 7. Mount luminaire over mounting plate and tighten set screw to secure.

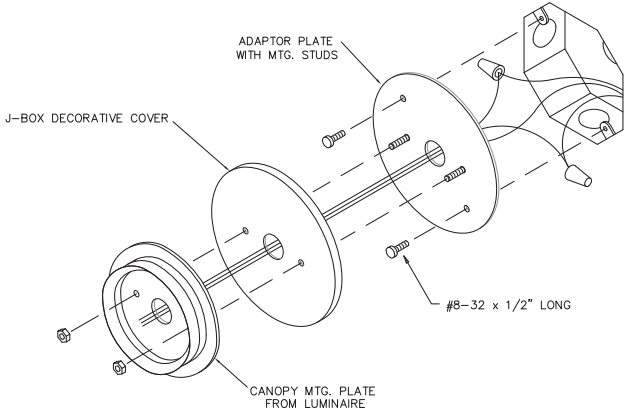

Relamping/Maintenance

No relamping necessary.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

Description	Part No
Glass	11256341
Gasket	820399
LED Driver (120-277V)	CONSULT
LED Module (3000K)	FACTORY
LED Module (4000K)	

Lamp: 3.0W LED

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

---

**Product Safety Warnings:**

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.**

**MIN 90°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.**

**LES FILS D'ALIMENTATION 90°C MIN.**

---