


Tools Required:

Phillips medium screwdriver
1/4" masonry/concrete drill bit
Drill
Adjustable wrench

Protection Class: IP65

Weight: 7.5 lbs.




Dimensions

A: 13-3/4"

B: 18-3/8"

C: 5-1/8"



Notice to Installer for 31 400:

1. See page 2 for specific product safety warnings.
2. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

NOTE: LEDs are high-quality electronic components! Please avoid touching them directly during installation.

NOTE: To avoid fingerprints on the luminaire use enclosed protective gloves during installation. The luminaire parts made of solid copper are delivered with the metal's natural surface color. Time and weather factors create the natural patina characteristic for copper.

79 824 anchorage installation:



1. Establish location for installation on finished concrete.
2. Determine location of drill holes using the base plate of the fixture as a template.
3. Drill (3) 1/4" holes in concrete in alignment with the template.
4. Align base plate holes with the drill holes.
5. Then drive the anchors through the baseplate and on into the drill holes until seated flush.
6. To fasten, tighten the acorn nuts.
7. Install fixture making necessary wiring connections.
8. Secure fixture with set screws or bolts provided.

31 400 - Installation:

1. Undo cap nuts at the luminaire base and take luminaire top off.
2. Unscrew glass from the luminaire housing.
3. Undo nuts and remove mounting plate from the baseplate.
4. Attach mounting plate to mounting surface. Feed luminaire wires through mounting plate.
5. Place baseplate onto mounting plate and tighten with nuts.
6. Make earth conductor connection.
7. Make supply wiring connections:
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE

Dimming (if applicable):

- DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
- DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
8. Mount luminaire over mounting plate and tighten set screw to secure.
9. Replace glass, ensure gasket is sealed properly.
10. Replace cap nuts at luminaire base and fix luminaire decorative top plate to the luminaire base.

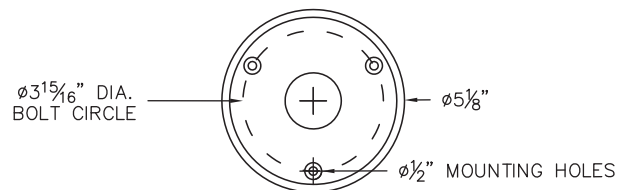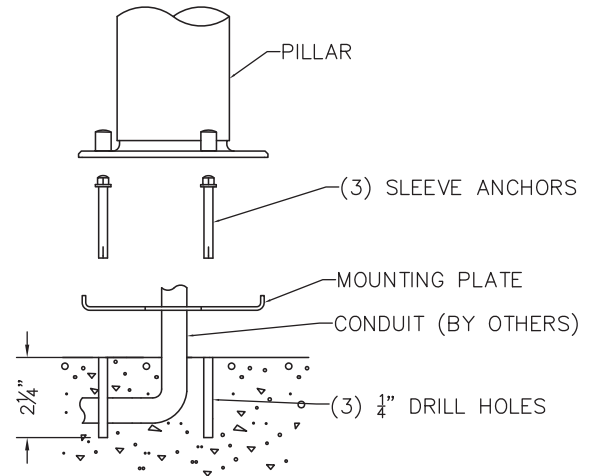

Relamping/Maintenance

No relamping necessary.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

Description	Part No
Glass w/ gasket	11253941
LED Module (3000K)	(x2) LED-0253/830
LED Driver (120-277V)	76023

Lamp: 6.4W LED

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.
