


Tools Required:

- Philips medium screwdriver
- 3mm hex head screwdriver
- 4mm hex head screwdriver



Dimensions

- A: 5-1/8 "
- B: 10 "



Protection Class: IP 64


Weight: 3.5 lbs.

Notice to Installer for 33 150:

- For wall and ceiling applications only.
- Mounts directly to standard recessed 4" octagonal wiring box (by others), using mounting kit (supplied).
- In conformance with UL Standard 1598, a silicone based sealant must be used between luminaire and supporting wall.
- LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation.

33 150- installation:

- Unscrew glass lens with gasket and remove from luminaire.
- Loosen (2) screws inside fixture base and turn fixture counter-clockwise to remove from base.
- Install (2) long 8-32 x 1 1/2" mounting screws (provided) in the back of the adapter plate as shown.
- Attach adapter plate to wiring box using (2) 8-32 x 1/2" screws provided. Feed luminaire wires through luminaire base and adapter plate.
- Make supply wiring and luminaire wiring connections in the octagonal wiring box:
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
Dimming (if applicable):
DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
- Place a small bead of silicone around the back side of the luminaire base that will come in contact with the finished wall (exterior applications only).
- Attach luminaire base to adapter plate over the mounting screws using the (2) acorn nuts provided in the mounting kit. Tighten the nuts to back the screws into the wiring box and secure the plate to the box.
- Mount luminaire onto luminaire base, over (2) base screws, making sure housing gasket is seated properly. Turn luminaire clockwise and tighten screws to secure.
- Replace lens and tighten, making sure that the gasket is seated properly.

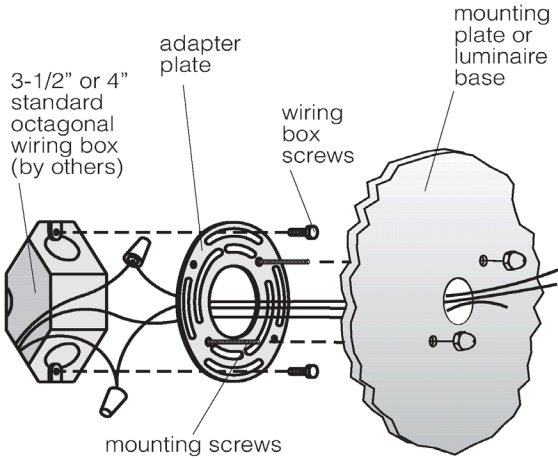

Relamping/Maintenance

No relamping required.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

Description	Part No
Lens	11273241-1
Lens gasket	830755
Driver (120-277V)	76024
LED module (3000K)	LED-0297/830A
LED module (4000K)	LED-0297/840A

Lamp: 5.9W LED

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

Product Safety Warnings:

CAUTION - RISK OF FIRE. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

ATTENTION - RISQUE D'INCENDIE. CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.
