



Tools Required:

- Philips medium screwdriver
- 5mm hex key
- Adjustable wrench



Dimensions

- A:** 4 "
- B:** 2-3/8 "
- C:** 5-1/8 "

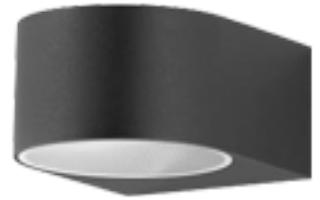

Protection Class: IP65

Weight: 1.8 lbs.

Notice to Installer for 33 223:

1. See page 2 for specific product safety warnings.
2. For attachment to separate small opening linear wiring box (19 542 provided by BEGA).
3. Wiring box needs to be recessed into wall and must be flush with the finished surface.
4. In conformance with UL Standard 1598, a silicone based sealant **MUST** be used between luminaire and supporting wall.
5. **WARNING:** LEDs are high quality electrical components. Please avoid touching them directly during installation.

19 542 - wiring box installation:


Hollow (stud) wall construction - Secure wiring box to wood or metal horizontal blocking as shown in Fig 1. Connect conduit to wiring box (if needed) and pull wires for electrical connections to be made later.

Poured concrete construction - Attach wiring box to the concrete form. Connect conduit to wiring box (if needed) and pull wires for electrical connections to be made later. Pour concrete and remove form.

IMPORTANT: Do not pour concrete directly on to box!

33 223 - luminaire installation:

1. Loosen (2) 5mm set screws and remove luminaire main casting off of luminaire base.
2. Feed luminaire wires through rear opening of luminaire and through luminaire base wireway hole.
3. Make supply wiring and luminaire wiring connections inside the small opening linear wiring box:
 - MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
 - NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
 - GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE.
- Dimming (if applicable):
 - DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
 - DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
4. Attach and secure luminaire base to 542 using hardware by others (8-32 screws).
5. Mount luminaire to luminaire base using (2) 5mm hex screws. Tighten screws evenly.

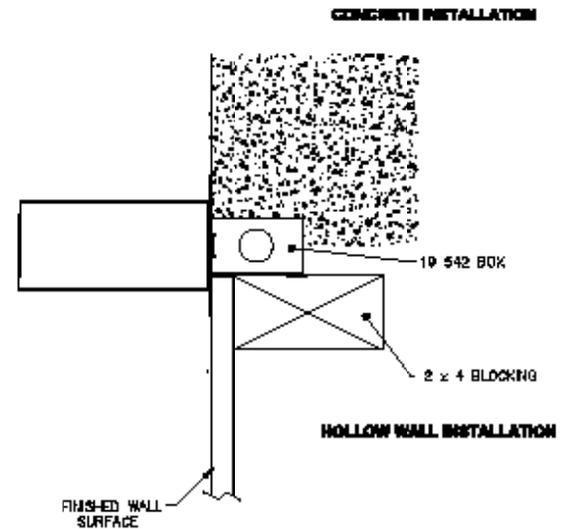

Relamping/Maintenance

No relamping necessary.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Wiring Box 19 545

Replacement Parts

Description	Part No
Driver	76066
LED replacement (3000K)	LED-0291/830
LED replacement (4000K)	LED-0291/840

Lamp: 3W LED

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.
