



**Tools Required:**

- 3mm hex key
- 4mm hex key
- 11/32" nut driver
- Phillips head screw driver medium

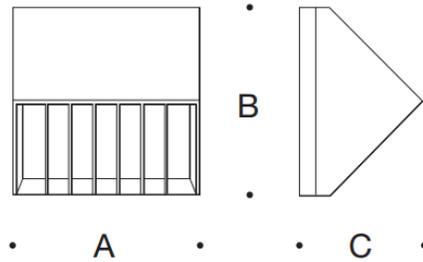

**Dimensions**

- A:** 11 "
- B:** 11 "
- C:** 6-7/8 "

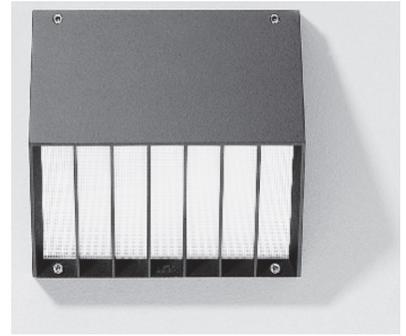

**Protection Class:** IP65

**Weight:** 8.8 lbs

**Notice to Installer for 33 239:**

1. For wall applications only.
2. Mounts directly to standard recessed 4" wiring box (by others) using mounting kit (provided).
3. In conformance with UL Standard 1598, a silicone based sealant must be used between luminaire and supporting wall.
4. LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation.

**33 239 - Installation:**


1. Loosen (4) trim screws and remove trim and glass lens.
2. Loosen inner 3mm hex screw and remove reflector.
3. Install (2) long 8-32 x 1 1/2" mounting screws (provided) in the back of the adapter plate as shown.
4. Attach adapter plate to wiring box using (2) 8-32 x 1/2" screws provided. Feed luminaire wires through luminaire base and adapter plate.
5. Make supply wiring and luminaire wiring connections in the octagonal wiring box:

MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE  
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE  
 GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE

Dimming (if applicable):

DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE  
 DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE

6. Place a small bead of silicone around the back side of the luminaire base that will come in contact with the finished wall (exterior applications only).
7. Attach luminaire base to adapter plate over the mounting screws using the (2) acorn nuts provided in the mounting kit. Tighten the nuts to back the screws into the wiring box and secure the plate to the box. NOTE orientation labels on luminaire base and position base on mounting surface.
8. Replace reflector, trim, and glass lens and tighten (4) screws evenly, making sure the gasket is seated properly

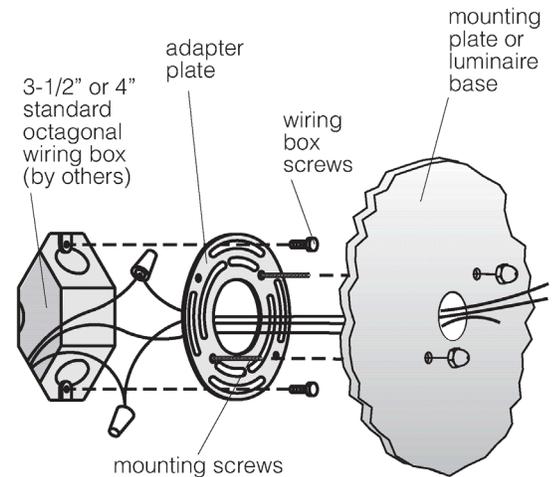

**Relamping/Maintenance**

No relamping required.

**Accessories**

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

**Replacement Parts**

Description	Part No
Face Plate	FP3239
Driver (120-277V)	75985-13
LED Module (3000K)	LED-0315/830
LED Module (4000K)	LED-0315/840

**Lamp:** 29.8W LED

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

**Product Safety Warnings:**

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.**

**MIN 60°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.**

**LES FILS D'ALIMENTATION 60°C MIN.**

---