


Tools Required:

- 2.5mm hex key
- 3mm hex key
- Phillips head screw driver medium



**Dimensions**  
**A:** 6-1/8 "  
**B:** 2 1/2 "



**Weight:** 2.2 lbs.


**Notice to Installer for 33 534:**

- 1. BEGA luminaires may be damaged if connected to conduit systems containing water- Article 300-5G of National Electric Code requires that "Conduits or raceways through which moisture may contact energized live parts shall be sealed or plugged at either or both ends".**
- 2. Mounts directly to a standard octagonal 4" wiring box (by others) using BEGA mounting kit (supplied).
- 3. In conformance with U.L. Standards 1598, a silicone-based sealant **MUST** be used between the mounting plate edge and supporting wall.
- 4. LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation.

**33 534 - installation:**

- 1. Loosen 3mm set screw on luminaire outer trim ring and turn ring to the stop (ccw). Remove trim ring with glass from luminaire base.
- 2. Loosen (2) hex screws on LED module plate and **CAREFULLY** remove LED module - trying not to come into direct contact with the LED chips.
- 3. Route LED wiring through luminaire base and into small opening wiring box for connections to be made.
- 4. Make supply wiring and luminaire wiring connections in the octagonal wiring box:  
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE  
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE  
WIRE GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE  
Dimming (if applicable):  
DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE  
DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
- 5. Place a small bead of silicone around the back side of the luminaire base that will come in contact with the finished wall (exterior applications only).
- 6. Mount luminaire base to surface using hardware by others (minimum 6-32 screw size).
- 7. Replace the LED module carefully along with luminaire lens and trim ring. Turn trim ring to the stop (cw) and tighten outer set screw to secure.

**Figure 1**

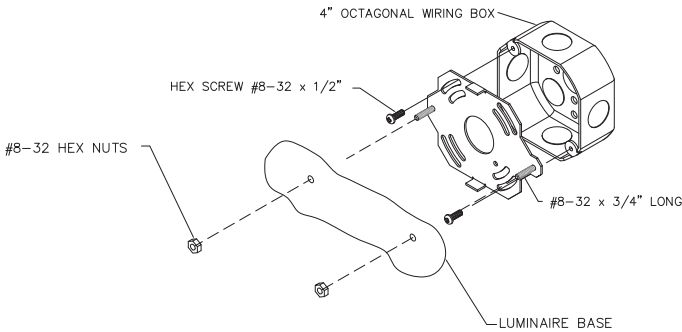

**Relamping/Maintenance**

No relamping required.

**Accessories**

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

**Replacement Parts**

Description	Part No
Lens	11286311
Lens gasket	831312
LED driver (120-277V)	76066
LED module (3000K)	LED-0337/930
LED module (4000K)	LED-0337/940

**Lamp:** 2.8W LED Module

**Product Safety Warnings:**

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.**

**MIN 60°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHERENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.**

**LES FILS D'ALIMENTATION 60°C MIN.**

---