


**Tools Required:**

Phillips medium screwdriver  
3mm hex screwdriver



**Dimensions**

**A:** 6-1/4 "  
**B:** 2 "  
**C:** 2 "



**Notice to Installer for 34 562:**

1. See page 2 for specific product safety warnings.
2. Luminaire is non-IC rated. Insulation must be at least 3" from luminaire.
3. Luminaire not suitable for poured concrete construction.
4. Minimum ceiling clearance is 7" to fit ceiling box. Minimum ceiling thickness 1/8", maximum ceiling thickness is 3/4".
5. CEILINGBOX-L-ELDO500 provided.
6. Ceiling cut out is 5-9/16"
7. Integral LED module and ceiling box with LED Driver included (**Figure 1**).
8. LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation.

**CEILINGBOX-L-ELDO500 Instructions:**

1. Fixture is connected to wiring box via quick-disconnect. Disconnect fixture and ceilingbox.
2. Unscrew (2) 3mm hex head screws to open ceiling box.
3. Bring supply wiring into ceiling box via strain relief bushing (**Figure 2**) and make connections from supply wires to driver wires (**Figure 3**):  
MAIN VOLTAGE SUPPLY WIRE TO BLACK BALLAST WIRE(S);  
NEUTRAL (COMMON SUPPLY WIRE TO WHITE BALLAST WIRE(S);  
GREEN GROUND WIRE TO GREEN BALLAST WIRE(S).

**Dimming (if applicable):**


- DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE  
DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
4. Tighten (2) Philips-head screws on strain relief bushing. Replace and tighten (2) 3mm hex head screws to close ceiling box. Connect the fixture to the ceilingbox via quick-disconnect.
  5. Push the ceiling box through the ceiling cut-out. The ceiling box will rest on ceiling panels or other ceiling construction material.

**Note: Minimum ceiling clearance of 7" is required to fit ceiling box.**

**34 562 Installation Instructions:**

1. Carefully unscrew glass diffuser.
2. Ensure fixture is attached to ceiling box via quick-disconnect.
3. Attach safety wire from luminaire to ceiling box by tightening (1) Philips-head screw into pre-drilled hole on ceiling box.
4. Place luminaire housing up into ceiling and tighten (2) 3mm hex-head screws to engage clamping system to attach and secure luminaire housing ceiling panel.
5. Ensure gasket is positioned correctly. Replace glass diffuser. Do not over-tighten.

**Figure 1**




**Figure 2**



**Figure 3**



**Figure 4 (generic image)**

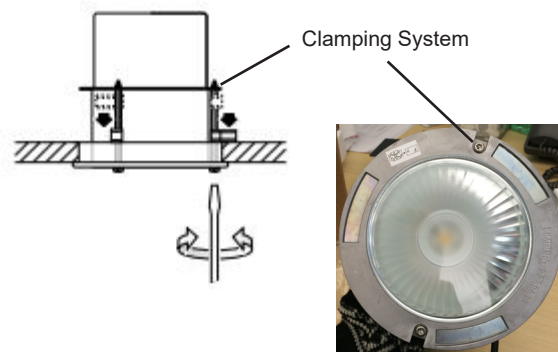

**Relamping/Maintenance**

No relamping required.

**Accessories**

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Ceiling Box CEILINGBOX-L-ELDO500

**Replacement Parts**

Description	Part No
Diffuser	113086
Driver (120-277V)	75999-03
LED Module (3000K)	LED-0328/930
LED Module (4000K)	LED-0328/940

**Lamp:** 9.6W LED

U.S. Patent Pending

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

**BEGA** 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

**Product Safety Warnings:**

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR DAMP LOCATIONS.**

**MIN 90°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS HUMIDES.**

**LES FILS D'ALIMENTATION 90°C MIN.**

---