


**Tools Required:**

- Flat head screw driver medium
- Phillips head screw driver medium

**Weight:** 16.31 lbs.

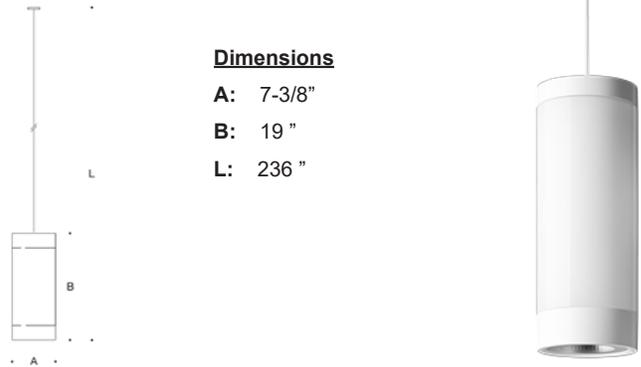

**Dimensions**

- A:** 7-3/8"
- B:** 19"
- L:** 236"

**Notice to Installer for 50 238:**

- See page 2 for specific product safety warnings.
- Mounts directly to standard recessed 4" octagonal wiring box (by others).
- LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation.

**Caution:** Fixture length cannot be modified in the field. Consult factory for custom lengths.

**50 238 - installation:**

- Unscrew steel cable griplock to separate canopy cover from canopy mounting plate.
- Feed driver wires through canopy mounting plate.
- Make supply wiring and driver wiring connections inside the wiring box (by others):


MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE  
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE  
 GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE

**Dimming (if applicable):**

DIMMING CONTROL WIRE (+) TO POSITIVE DIM CONTROL WIRE  
 DIMMING CONTROL WIRE (-) TO NEGATIVE DIM CONTROL WIRE

- Mount canopy baseplate directly to standard recessed 4" octagonal wiring box (by others).
- Move canopy cover up to the ceiling/canopy mounting plate and tighten steel cable griplock to secure.

**Figure 1: Mounting Canopy (Generic Image)**

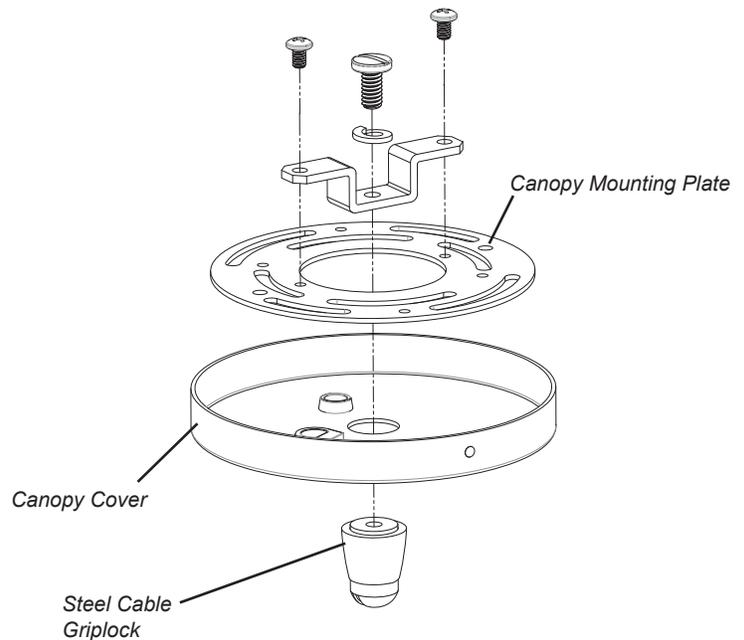

**Relamping/Maintenance**

Unscrew glass by turning counter-clockwise. Clean glass and luminaire using on solvent-free cleansers. Replace glass.

|              |           |            |
|--------------|-----------|------------|
| <b>Lamp:</b> | 27.2W LED | Opal Glass |
|              | 17.0W LED | Downlight  |
|              | 9.4W LED  | Uplight    |

**Accessories**

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

**Replacement Parts**

| <u>Description</u>    | <u>Part No</u>    |
|-----------------------|-------------------|
| <b>Opal Glass</b>     |                   |
| LED driver (120-277V) | Consult Factory   |
| LED module (3000K)    | (x4) LED-0660/830 |
| LED module (4000K)    | (x4) LED-0660/840 |
| <b>Downlight</b>      |                   |
| LED driver (120-277V) | Consult Factory   |
| LED module (3000K)    | LED-0678/830      |
| LED module (4000K)    | LED-0678/840      |
| <b>Uplight</b>        |                   |
| LED driver (120-277V) | Consult Factory   |
| LED module (3000K)    | (x2) LED-0660/830 |
| LED module (4000K)    | (x2) LED-0660/840 |

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

**Product Safety Warnings:**

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR DAMP LOCATIONS.**

**MIN 90°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS HUMIDES.**

**LES FILS D'ALIMENTATION 90°C MIN.**

---