

Tools Required:

Phillips medium screwdriver
Standard medium screwdriver

Dimensions

A: 13"

B: 4-1/8"



Protection Class: IP65

Weight: 5.5 lbs.

Notice to Installer for 55 117:

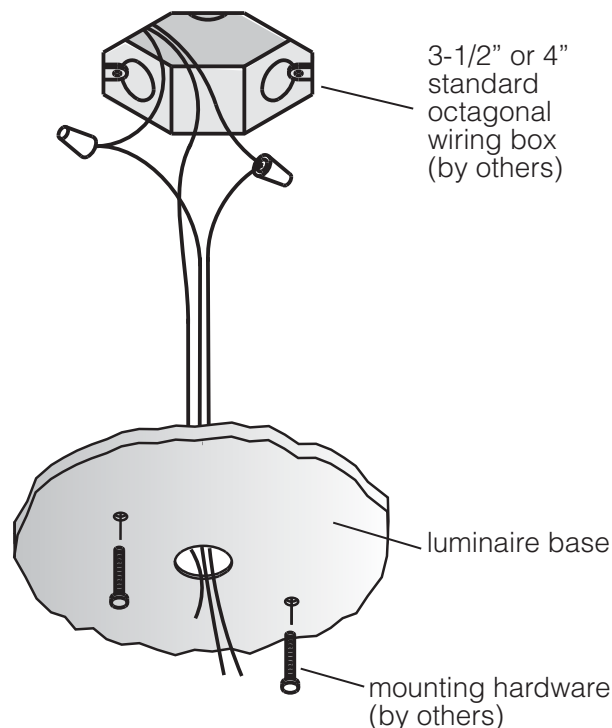
1. **BEGA luminaires may be damaged if connected to conduit systems containing water- Article 300-5G of National Electric Code requires that "Conduits or raceways through which moisture may contact energized live parts shall be sealed or plugged at either or both ends".**
2. Mounts directly to ceiling or wall OVER standard recessed 4" octagonal wiring box (by others).
3. In conformance with U.L. Standards 1598, a silicone-based sealant **MUST** be used between the mounting plate edge and supporting wall.
4. LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation.

55 117 - Installation:

1. Turn diffuser counter-clockwise remove lens from luminaire base, carefully.
2. Feed luminaire wires through luminaire base.
3. Make supply wiring and luminaire wiring connections in the octagonal wiring box:
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE

Dimming (if applicable):

- DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
4. Mount luminaire to ceiling over recessed wiring box using hardware by others (minimum size 8-32 screws, see figures).
 5. Replace diffuser by turning clockwise.


Relamping/Maintenance

No relamping required

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

| Description | Part No |
|--------------------|--------------|
| Lens | 112504.1 |
| LED Driver | 75593 |
| LED Module (3000K) | LED-0384/830 |
| LED Module (4000K) | LED-0384/840 |

Lamp: 15.6W LED

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.