

Tools Required:

4mm hex key
Adjustable Wrench
11/16" wrench



Dimensions

A: 12-5/8"
B: 14-1/2"
C: 13-1/2"
D: 4-3/8"



Protection Class: IP44

Weight: 4.0 lbs.

Notice to Installer for 66 411:

1. For wall applications only.
2. Mounts directly to standard recessed 4" octagonal wiring box (by others), using mounting kit (supplied).
3. In conformance with UL Standard 1598, a silicone based sealant must be used between luminaire and supporting wall.
4. For downwards orientation only.

66 411 - installation:


1. Loosen 4mm set screw on fixture canopy and remove mounting plate.
2. Install (2) long 8-32 x 1 1/2" screws (provided) in the back of the adapter plate as shown.
3. Attach adaptor plate to wiring box using (2) 8-32 x 1/2" screws provided. Feed luminaire wires through luminaire mounting plate and adaptor plate.
4. Make supply wiring and luminaire wiring connections in the octagonal wiring box:

MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE

Dimming (if applicable):

DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER WIRE
DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER WIRE

5. Note orientation labels on luminaire mounting plate. Test to make sure the mounting plate is level by adjusting the adaptor plate, if needed.
6. Place a small bead of silicone around the back side of the mounting plate and luminaire that will come in contact with the finished wall (exterior applications only).
7. Attach mounting plate to adaptor plate over the mounting screws using the (2) acorn nuts provided in the mounting kit. Tighten the nuts to back the screws into the wiring box and secure the plate to the box.
8. Mount luminaire to mounting plate and tighten canopy screw to secure luminaire, making sure orientation label is aimed correctly.
9. Insert shade reflector into luminaire housing. Screw luminaire glass into place to secure reflector.

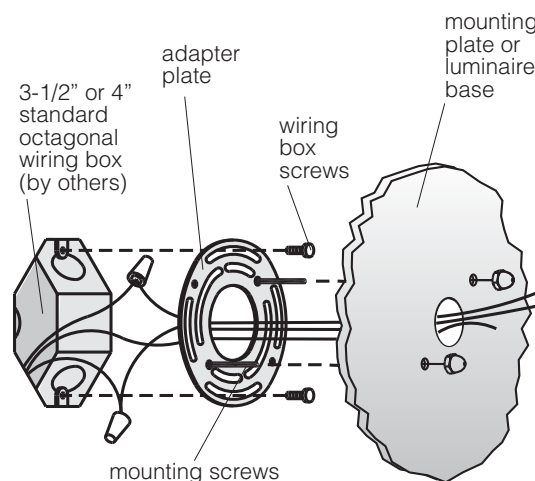

Relamping/Maintenance

No relamping necessary.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

Description	Part No
Diffuser	11232741
LED module (3000K)	LED-0505/930
LED module (4000K)	LED-0505/940
Driver (120-277V)	75939

Lamp: 8.9W LED

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.
