


Tools Required:

4mm hex key
Phillips medium screwdriver
Adjustable wrench

Protection Class: IP66

Weight: 9.26 lb.


Dimensions

A: 10 "
B: 2-3/8 "
C: 16-1/8 "
D: 5 1/8 "


Notice to Installer for 66 453:

- For wall applications only.
- Mounts directly to standard recessed 4" octagonal wiring box (by others), using mounting Kit #3 (supplied).
- Silicone based sealant must be used between luminaire and supporting wall, [In conformance with UL Standard 1598]

66 453 - Luminaire Installation:

- Using Kit #3 install (2) of the long wiring box screws into back of adapter plate, facing luminaire. (Figure 1)
- Using Kit #3 attach adapter plate to wiring box using (2) short screws (provided). (Figure 1)
- Route supply wiring through center of adapter plate.
- Route luminaire wiring out from luminaire mounting plate and adapter plate.
- Make supply wiring and luminaire wiring connections:
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
0-10V Dimming (if applicable):
DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
- Insert completed wiring connections into wiring box.
- Adjust tilt angle of fixture by loosening hex nut located on luminaire base. (Figure 2)
- Adjust to desired angle. Tighten hex nut at desired angle. (Figure 2)
- Align luminaire base / mounting plate over mounting screws and place over adapter plate
- Attach (2) acorn nuts provided in mounting kit to secure the luminaire to the wiring box
- Mount luminaire to mounting plate and tighten canopy set screw to secure luminaire, making sure orientation label is aimed correctly.
- Silicone based sealant must be used between luminaire and supporting wall. (Exterior applications only).

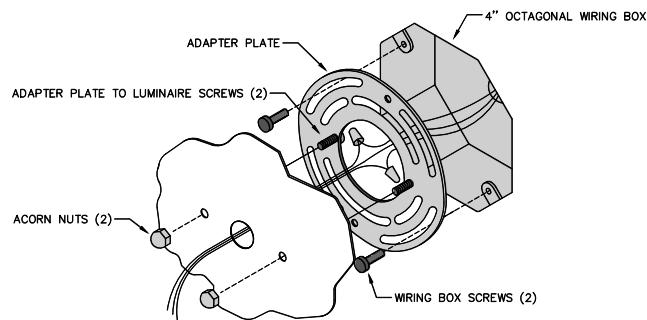
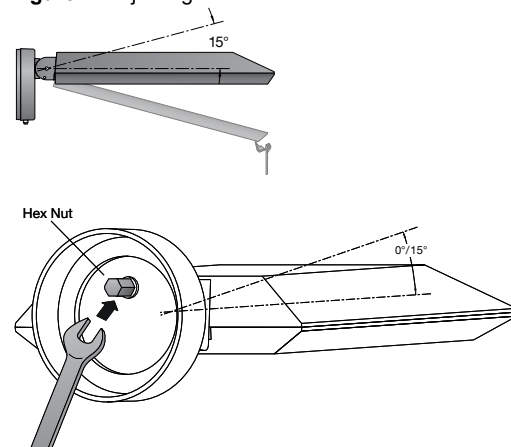


Figure 2: Adjusting Tilt


Cleaning/Maintenance

Push on clamp and remove faceplate. Clean luminaire and lens using only solvent-free cleansers. Replace faceplate.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

Description	Part No
LED Driver	75983-01
LED Module (4000K)	LED-0410/840
LED Module (3000K)	LED-0410/830

Lamp: 14W LED

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.
