


Tools Required:

- 3mm hex key
- 4mm hex key
- Adjustable wrench

Protection Class: IP 66

Weight: 13.2 lbs.



- Dimensions**
- A: 8-7/8 "
 - B: 11-1/2 "
 - C: 20 "



Notice to Installer for 77 025:


1. For pole top applications only.
2. Slip fits 3" O.D. poles only.
3. **WARNING:** LEDs are high quality electrical components. Please avoid touching them directly during installation.

77 025 - installation:

1. Route the luminaire wiring through to the pole base and slip luminaire over the top of the pole.
2. Secure luminaire by tightening 3mm set screw on pole fitter.
3. Make supply wiring and luminaire wiring connections in base of pole:
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE

Dimming (if applicable):

- DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
 - DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
4. To adjust beam direction, loosen M10 nut at joint and adjust accordingly (angle adjustable in steps of 10° up to +90°). Tighten joint nut to secure.

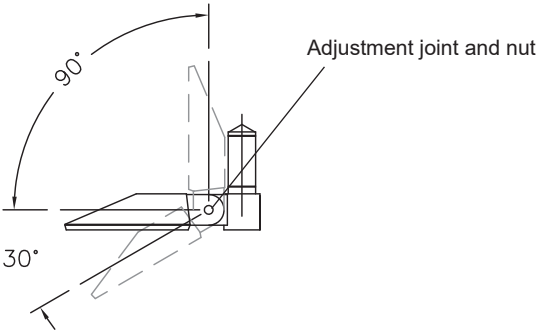

ADJUSTABILITY

Relamping/Maintenance

No relamping required.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

Description	Part No
Diffuser	140627
Driver (120-277V)	75985-01
LED Module (3000K)	(x2) LED-0226/830A
LED Module (4000K)	(x2) LED-0226/840A

Lamp: 15.8W LED

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.
