


Tools Required:

- 4mm hex key
- 13mm hex socket
- Adjustable wrench



Dimensions

- A: 15-3/8 "
- B: 5-3/8 "
- C: 55 "



Protection Class: IP66

Weight: 43.0 lbs.

Notice to Installer for 77 530:

1. See page 2 for specific product safety warnings.
2. Slip fits 3" outer diameter poles only.
3. Minimum inner pole diameter = 2-7/16". Maximum inner pole diameter = 2-3/4".
4. Slip fitter insert depth into pole = 4".
5. LEDs are high quality electrical components. Please avoid touching them directly during installation.
6. **WARNING:** When adjusting beam direction, fixture will drop quickly upon loosening hex nut. See below for instructions.

77 530 - Installation:

1. Loosen M5 screw on pole cap and remove pole cap (Figure 1).
 2. Lead luminaire wires into top of pole and through to the base.
 3. Secure luminaire head to pole by tightening 13mm hex nut AND outer M8 set screw (Figures 2 and 3).
 4. To adjust beam direction (up to 15 degrees), undo hex nut and adjust joint (Figure 3). Be sure teeth are secured into position. **BE CAREFUL AS THE FIXTURE WILL DROP QUICKLY UPON LOOSENING.**
 5. Tighten hex nut firmly.
 6. Replace slip fitter cap and retighten pole cap hex screw.
 7. Make supply wiring and luminaire wiring connections inside pole base:
 - MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
 - NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
 - GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
- Dimming (if applicable):
- DIMMING CONTROL WIRE (+) TO POSITIVE LUMINAIRE DIM CONTROL WIRE
 - DIMMING CONTROL WIRE (-) TO NEGATIVE LUMINAIRE DIM CONTROL WIRE

Figure 1

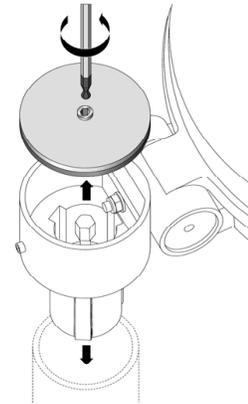


Figure 2


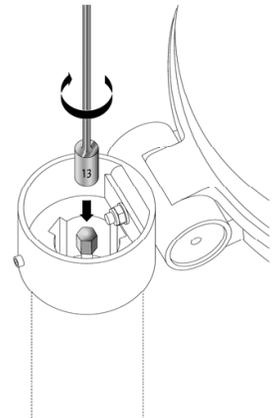


Figure 3

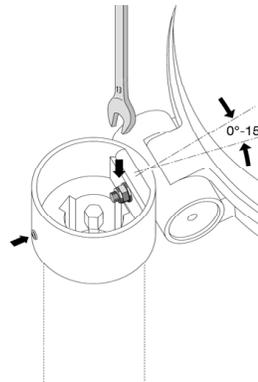

Relamping/Maintenance

Clean luminaire and lens using only solvent-free cleansers.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

Description	Part No
Lens (x2)	150367
Gasket (x2)	831215
LED Driver (120V-277V) (x2)	75945
LED Module (3000K) (x4)	LED-0622/830
LED Module (4000K) (x4)	LED-0622/840

Lamp: (2) 57.4W LED

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.

MIN 60°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 60°C MIN.
