


Tools Required:

3mm hex key
5mm hex key
Flat head screw driver medium
Phillips head screw driver medium
CSA certified to U.S. and Canadian standards.
Suitable for wet locations.



Dimensions

A: 9"
B: 8-7/8"
C: 4"



Protection Class: IP65


Weight: 5.7 lbs

Notice to Installer for 77 539:

1. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
2. Integral LED driver supplied by BEGA.
3. Luminaire mounts directly to standard recessed 4" octagonal wiring (by others), using mounting plate provided.
4. Do NOT remove moisture absorption packet from luminaire housing.
5. **WARNING:** LEDs are high quality electrical components. Please avoid touching them directly during installation.

77 539 - installation:

1. Loosen the (1) 3mm hex screw on the luminaire canopy and remove luminaire base from luminaire.
2. Feed luminaire wiring through the luminaire base and mounting plate.
3. Make supply wiring and luminaire wiring connections inside the wiring box:
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
Dimming (if applicable):
DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
4. Attach provided mounting plate directly to a 4" standard octagonal wiring box using the (2) screws (provided). Place a small bead of silicone around the back side of the mounting plate that will come in contact with the finished surface (exterior applications only).
5. Align and position mounting plate on mounting surface to correspond with specified mounting orientation.
6. Slip luminaire base over the mounting plate. Tighten nuts on the studs (provided) to secure.
7. Replace luminaire canopy (with luminaire attached) and tighten (1) set screw.
8. To adjust head angle, use 5mm hex key to loosen adjustment screw. Adjust luminaire head as needed and tighten adjustment screw.

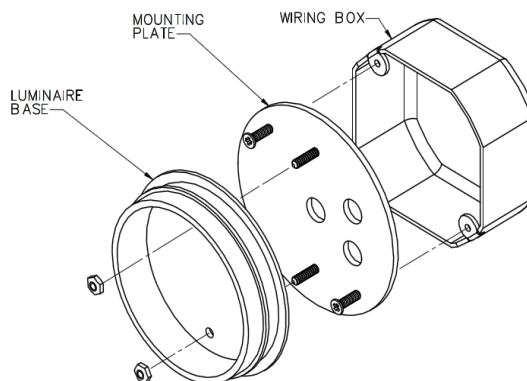

Relamping/Maintenance

No relamping necessary.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Shield 70 502

Replacement Parts

Description	Part No
Lens	140947
Gasket	83001871
LED driver	75960
LED module (3000K)	LED-0323/830
LED module (4000K)	LED-0323/840

Lamp: 39W LED