


Tools Required:

- 3mm hex key
- Adjustable Wrench



Dimensions

- A: 4-1/8 "
- B: 6 "
- C: 4-3/8 "




Protection Class: IP65

Notice to Installer for 77 699:

1. See page 2 for specific product safety warnings.
2. It is the installing contractor's responsibility to provide the necessary blocking around the junction box to ensure that the mounting plate or accessory (by others) is properly secured.
3. Provided with a stainless steel nipple threaded 1/2" I.P.S. for direct attachment to cast boxes or a selection of mounting accessories (by others).
4. Requires a remote 24V DC class 2 electronic power supply to operate intended LED wattage.
5. Do NOT remove moisture absorption packet from luminaire housing.

Figure 1

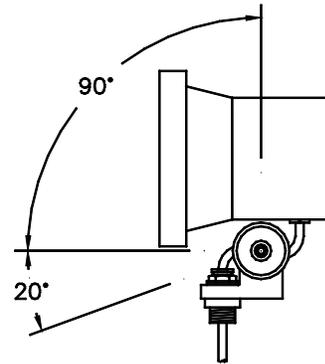

77 699 - installation:

1. Make 24V DC supply wiring and luminaire connections inside the wiring box (by others):
 NEGATIVE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
 POSITIVE SUPPLY WIRE TO RED LUMINAIRE WIRE
2. Screw and secure mounting bushing into the female thread provided on site.
3. To adjust head angle, use 3mm hex key to loosen adjustment screw. Adjust luminaire head and tighten adjustment screw.

Relamping/Maintenance

Remove trim and lens by loosening screws. Clean luminaire and lens using only solvent-free cleansers. Replace trim and lens. Tighten screws.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

180° Glare Shield	70 755
Elliptical Spread Lens	70 050
Remote 25W LED Driver	19 580
Remote 50W LED Driver	19 591

Replacement Parts

<u>Description</u>	<u>Part No</u>
Lens	140850
Lens gasket	831652
LED Driver	76014
LED Module (3000K)	LED-0733/830
LED Module (4000K)	LED-0733/840

Lamp: 7.9W LED, 24V DC

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.

ATTENTION - RISQUE D'INCENDIE. CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.
