


Tools Required:

- 3mm hex key
- 5mm hex key
- Adjustable Wrench



- Dimensions**
- A: 6-1/4 "
 - B: 8-1/2 "
 - C: 6-1/2 "



Protection Class: IP65

Weight: 3.86 lbs.


Notice to Installer for 77 703:

1. See page 2 for specific product safety warnings.
2. It is the installing contractor's responsibility to provide the necessary blocking around the junction box to ensure that the mounting plate or accessory (by others) is properly secured.
3. Provided with a stainless steel nipple threaded 1/2" I.P.S. for direct attachment to cast boxes or a selection of mounting accessories (by others).
4. Integral LED module and LED driver supplied by BEGA.
5. Do NOT remove moisture absorption packet from luminaire housing.

77 703 - installation:

1. Make supply wiring and luminaire wiring connections inside the wiring box (by others):
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
Dimming (if applicable):
DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
2. Screw and secure mounting bushing into the female thread provided on site.
3. To adjust head angle, use 5mm hex key to loosen adjustment screw. Adjust luminaire head and tighten adjustment screw.

Figure 1

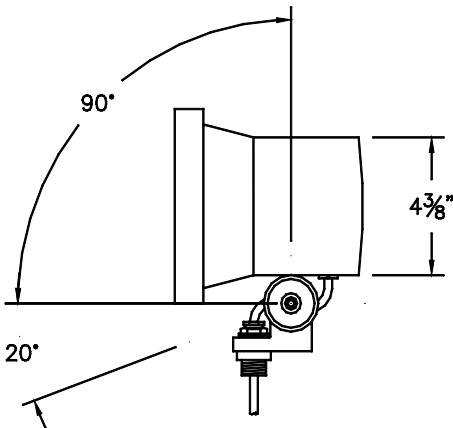

Relamping/Maintenance

Remove trim and lens by loosening screws. Clean luminaire and lens using only solvent-free cleansers. Replace trim and lens. Tighten screws.

Lamp: 12.5W LED Module

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

180° glare shield	70 757
360° glare shield	70 720
Flat beam lens	70 076

Replacement Parts

Description	Part No
Lens	140877M
Lens gasket	831280
Driver	76052
LED Module (3000K)	LED-0724/830
LED Module (4000K)	LED-0724/840

Product Safety Warnings:

CAUTION - RISK OF FIRE. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

ATTENTION - RISQUE D'INCENDIE, CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.
