


Tools Required:

6mm hex key
Adjustable Wrench


Dimensions

A: 15-3/4 "
B: 18 "
C: 4-3/4 "
D: 9-1/2 "



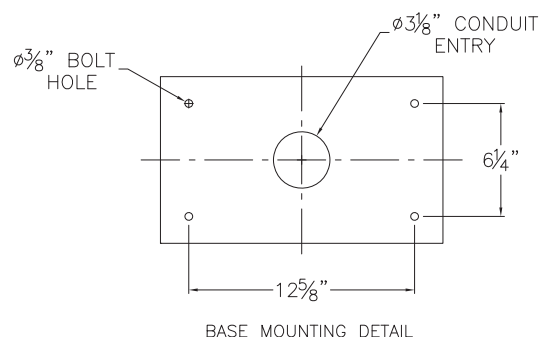
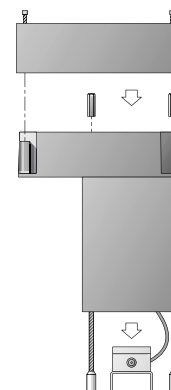
Protection Class: IP65

Notice to Installer for 77 754:

1. Fixture may be damaged if connected to conduit systems that contain water - Article 300-5G of the National Electric Code requires that "Conduits or raceways through which moisture may contact energized live parts shall be sealed or plugged at either or both ends."
2. Anchorage hardware (by others) must be installed in concrete pad/foundation.
3. It is recommended that when installing in planting areas the bollard base be slightly elevated to avoid prolonged submerging during heavy rains.
4. Wet location listing does not imply suitability for exposure to standing water for long periods of time.
5. LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation.

77 754 - installation:

1. Loosen (4) 6mm hex screws on bollard top and remove top from lower fixture.
2. Loosen (2) hex nuts and remove from inside upper fixture compartment. Lift and remove bollard housing vertically from lower mounting plate.
3. Feed luminaire wires through conduit hole in the mounting plate.
4. Connect luminaire wires to supply wires inside wiring box:
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
GREEN (GROUND) WIRE TO GREEN LUMINAIRE WIRE
- Dimming (if applicable):
DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
5. Attach and fix mounting plate to surface using suitable anchorage hardware (by others).
6. Lower bollard housing onto mounting plate studs and secure using (2) hex nuts in upper fixture compartment. Tighten nuts to secure.
7. Replace bollard top and tighten (4) hex screws to secure, making sure the gasket is seated properly.


Relamping/Maintenance

No relamping required.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Anchor Kit 79 808

Replacement Parts

Description	Part No
Lens	(consult factory)
Gasket	820362
Reflector	761269
Driver (120-277V)	75983-02
LED Module (3000K)	LED-0297/830
LED Module (4000K)	LED-0297/840

Lamp: 11.8W LED

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMBLEMES MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.