


Tools Required:

- 3mm hex key
- Standard medium screw driver
- Phillips screw driver



Dimensions

- A:** 6-1/4 "
- B:** 6-1/4 "
- C:** 3-3/4 "



Protection Class: IP65


Weight: 1.5 lbs.

Notice to Installer for 22292:

1. For wall applications only.
2. Mounts directly to standard recessed 4" wiring box (by others) using mounting kit (provided).
3. In conformance with UL Standard 1598, a silicone based sealant must be used between luminaire and supporting wall.
4. LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation.

22292 installation:

1. Loosen (4) 3mm housing hex screws and remove outer casting with lens attached.
2. Install (2) long 8-32 x 1 1/2" mounting screws (provided) in the back of the adapter plate as shown.
3. Attach adapter plate to wiring box using (2) 8-32 x 1/2" screws provided. Feed luminaire wires through luminaire base and adapter plate.
4. Make supply wiring and luminaire wiring connections inside the octagonal wiring box:
 MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
 GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
 Dimming (if applicable):
 DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
 DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
5. Place a small bead of silicone around the back side of the luminaire base that will come in contact with the finished wall (exterior applications only).
6. Attach luminaire base to adapter plate over the mounting screw using the (2) acorn nuts provided in the mounting kit. Tighten the nuts to back the screws into the wiring box and secure the plate to the box.
 IMPORTANT: note position of orientation arrow on mounting plate and install accordingly.
7. Replace outer casting and tighten (4) housing screws, making sure the gasket is sealed properly.

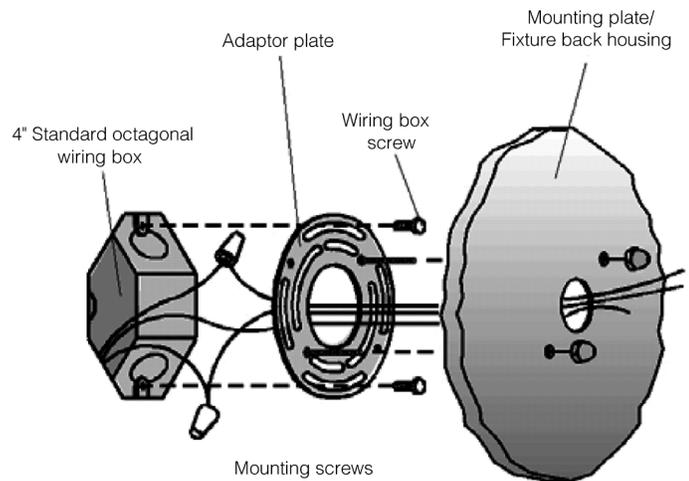

Relamping/Maintenance

No relamping required.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

Description	Part No
Faceplate Gasket	Consult Factory 830396
LED Board LED Driver	LED-0322/930 75987

Lamp: 7.9W LED

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.