

Tools Required:

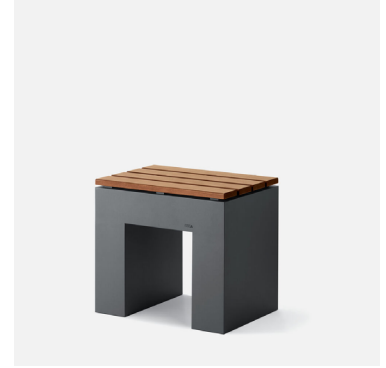
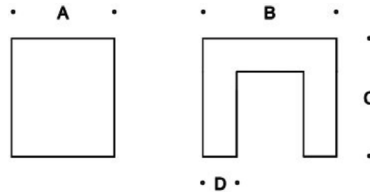
- 5mm hex key
- Philips medium screwdriver
- Adjustable wrench

Overview:

LED Watts: 5.6W
 System Watts: 7.4W
 Controllability: 0-10V, TRIAC, and ELV
 Weight: 53.4 lbs

Dimensions

A: 15-3/4"
B: 19-5/8"
C: 19-3/8"
D: 4-3/4"


Notice to Installer:

1. Fixture may be damaged if connected to conduit systems that contain water - Article 300-5G of the National Electric Code requires that "Conduits or raceways through which moisture may contact energized live parts shall be sealed or plugged at either or both ends."
2. 79 810 anchorage kit (included) must be installed in concrete pad/foundation.
3. It is recommended that when installing in planting areas the base be slightly elevated to avoid prolonged submerging during heavy rains.
4. Wet location listing does not imply suitability for exposure to standing water for long periods of time.

79810 anchorage installation:



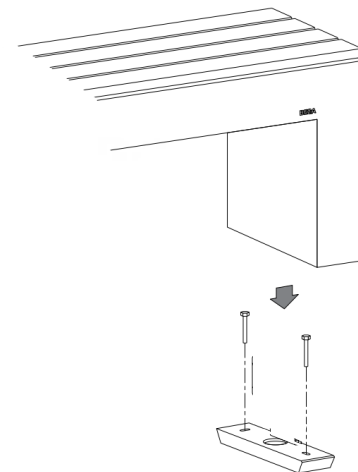
1. Provide means to bring supply wiring to the light element in accordance with local code. The templates have 2" O.D. conduit holes for conduit entry.
2. Assemble anchorage kit. Unscrew the (4) hex bolts from the female couplers. Remove each hex bolt and washer. Align each anchor bolt with each of the holes in the two templates. Attach each anchor bolt to the templates by replacing the washer and hex bolt and tightening.
3. Determine the finished grade for the application. Use leveling hardware to adjust templates to desired finished height after pouring.
4. Install anchorage kit using either method:
 - A. Attach templates to forming or cross bracing using the (2) nail holes provided in each template. Level templates properly. Pour concrete.
 - B. Insert anchorage assembly into poured concrete. Concrete must be vibrated to ensure proper anchorage setting. Level templates properly.

84237 installation:

1. Loosen (4) 5mm hex set screws at base of legs and remove mounting plates.
2. Leave anchorage templates in place to provide a smooth, flat surface to install mounting plates.
3. Align mounting plate holes with anchorage holes.
4. Bolt the mounting plates to the anchorage kits using the (4) hex bolts and washers.
5. Make supply wiring and luminaire wiring connections on right side below BEGA LOGO inside fixture leg.

MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE;
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE;
 GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE.

0-10V DIMMING (IF APPLICABLE)
 DIM CONTROL (+) TO POSITIVE DRIVER DIM CONTROL WIRE
 DIM CONTROL (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
6. Place light element onto mounting plates and tighten (4) set screws to secure.

Figure 1

Figure 2

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Maintenance:

Clean regularly with solvent-free cleaner removing dirt and debris. Do not use high pressure cleaners. No relamping required.

Replacement Parts

See label inside of fixture for LED replacement part number.

Consult factory for all other replacement components.

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS. MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.