

Tools Required:

- 5mm Tamper-proof Hex Key (Included)
- 6mm Hex Key

Overview:


LED Watts: 97.2W
 System Watts: 122.0W
 Controllability: 0-10V dimming down to 10%
 Weight: 23.8 lbs.
 Protection Class: IP67

Notice to Installer:

1. See page 2 for specific product safety warnings.
2. BEGA floodlights may be installed by using a variety of accessory mounting equipment.
3. Maximum operating temperature 25°C ambient.

Floodlight Installation:

1. Install the floodlight using the appropriate BEGA mounting accessory, or mount the stainless steel yoke directly to a surface capable of providing suitable anchorage for the weight of the fixture. Mounting holes are provided in the yoke.
2. If a BEGA mounting accessory is used, thread the outdoor cord through the water-tight compression fitting and lock it down securely. If a BEGA mounting accessory is not used, a separate wet location box must be supplied (by others) and a U.L. Listed water tight compression fitting must be used to accept the cord from the fixture.
3. Make supply wiring and LED driver connections:
 MAIN VOLTAGE SUPPLY WIRE TO BLACK LED DRIVER WIRE
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LED DRIVER WIRE
 GREEN GROUND WIRE TO GREEN DRIVER WIRE
 Dimming (if applicable):
 DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
 DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
4. Floodlight is vertically adjustable between -10° and +170°. To adjust floodlight aiming angle, loosen (2) 6mm hex head screws on either side of the yoke where it attaches to the floodlight. Aim the floodlight as desired and then tighten the (2) 6mm hex head screws to lock into place.

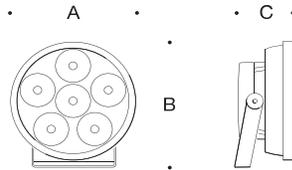


Dimensions

- A:** 14 3/4"
B: 16"
C: 6 7/8"



Figure 1: Yolk Mounting Detail

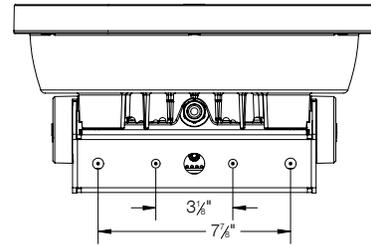

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

180° glare shield	71 110
360° glare shield	79 510
Mounting bracket for pole top Ø 3"	79 435
Pole mount canopy for 5" O.D. pole	79 553
Wall mount canopy	79 554
Pole mount arm for for 5" O.D. pole	79 550
Wall mount arm	79 551
Pole mount hub for pole top Ø 3"	79 555
Pole top for 2 floodlights	70 762
Pole top for 3 floodlights	70 763
Pole top for 4 floodlights	70 764

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Cross beam for 3 floodlight	70 761
Cross beam for 6 floodlights	70 765

Maintenance:

Clean regularly with solvent-free cleaner removing dirt and debris. Do not use high pressure cleaners.

Replacement Parts

See label inside of fixture for LED replacement part number.

Consult factory for all other replacement components.

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS. MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.