


BEGA

Photometric Filename: 22423.IES

TEST: BE_22423
TEST LAB: BEGA
DATE: 12/21/2016
LUMINAIRE: 22 423
LAMP: 2.9W LED

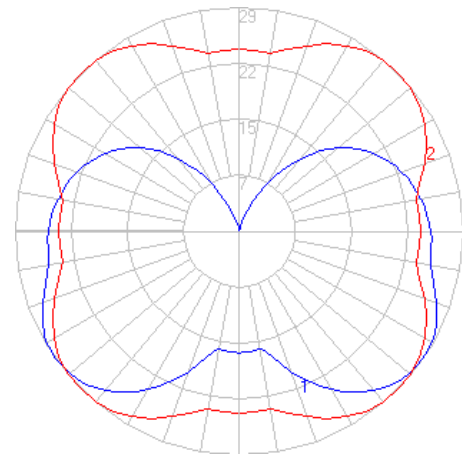


Characteristics

IES Classification	Type VS
Longitudinal Classification	Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	243
Downward Total Efficiency	N.A.
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	49
Total Luminaire Watts	5
Ballast Factor	1.00
Upward Waste Light Ratio	0.39
Max. Cd.	29.1 (50H, 55V)
Max. Cd. (<90 Vert.)	29.1 (50H, 55V)
Max. Cd. (At 90 Deg. Vert.)	25 (10.3%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	25.3 (10.4%Lum)
Cutoff Classification (deprecated)	N.A. (absolute)


Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	8.1	N.A.	3.4
FM (30-60)	29.2	N.A.	12.0
FH (60-80)	24.5	N.A.	10.1
FVH (80-90)	11.8	N.A.	4.9
BL (0-30)	8.1	N.A.	3.4
BM (30-60)	29.2	N.A.	12.0
BH (60-80)	24.5	N.A.	10.1
BVH (80-90)	11.8	N.A.	4.9
UL (90-100)	23.2	N.A.	9.5
UH (100-180)	72.4	N.A.	29.8
Total	242.8	N.A.	100.0

BUG Rating B0-U3-G1

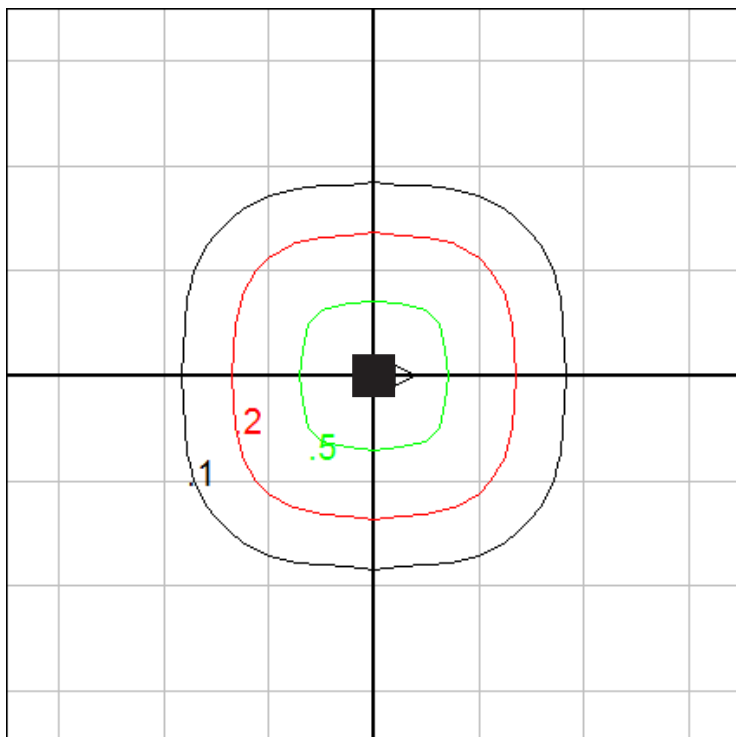

Wall Mount Fixture - Isofootcandle grid on floor
Mounting Height = 5 ft. Grid Spacing = 5 ft.

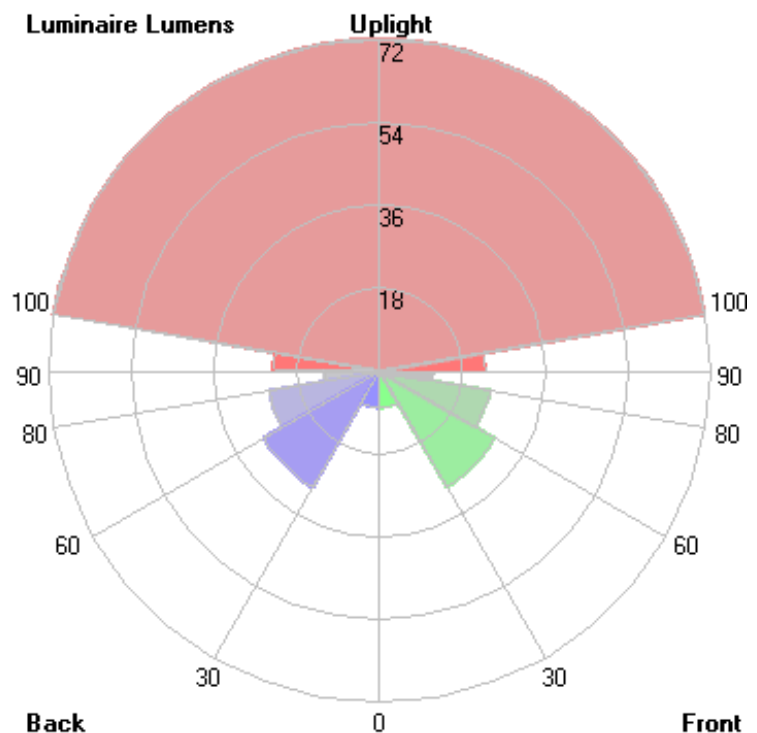

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

6/15/2018