


Tools Required:

4mm hex key



Dimensions

A: 28 "

B: 14-1/4 "




Protection Class: IP65

Weight: 32.2 lbs.

Notice to Installer for 84 404:

- 1. See page 2 for specific product safety warnings.
- 2. For pole top applications only.
- 3. Slip fits 3" O.D. poles only.
- 4. Requires a MINIMUM 2-1/2" length of straight diameter pole/tenon.
- 5. LED module and integral driver provided by BEGA.
- 6. Pole top luminaire supplied with 25 feet of cable to route through pole.
- 7. Fixture should not be opened during installation.

Figure 1

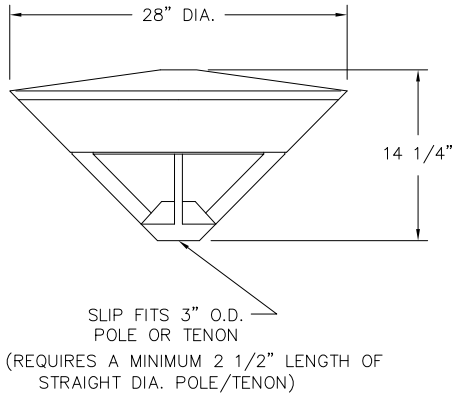

84 404 - installation:

- 1. Lead luminaire wires into top of pole and through to the base.
- 2. Slip luminaire onto top of pole and secure by tightening (4) M8 set screws on pole, evenly.
- 3. Make supply wiring and luminaire wiring connections inside pole base:
 - MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
 - NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
 - GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
- Dimming (if applicable):
 - DIMMING CONTROL WIRE (+) TO POSITIVE LUMINAIRE DIM CONTROL WIRE
 - DIMMING CONTROL WIRE (-) TO NEGATIVE LUMINAIRE DIM CONTROL WIRE

Relamping/Maintenance

No relamping necessary.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

Description	Part No
LED Driver (x2)	75985-02
LED Module (3000K) (x2)	LED-0172/830
LED Module (4000K) (x2)	LED-0172/840

Lamp: 51.6W LED Module

Product Safety Warnings:

MIN 60°C SUPPLY CONDUCTORS.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

SUITABLE FOR WET LOCATIONS.

LES FILS D'ALIMENTATION 60°C MIN.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.

CONVIENT AUX EMPLACEMENTS MOUILLÉS.