


Tools Required:

4mm hex key
Adjustable wrench

Protection Class: IP 66

Weight: 14.1 lbs.


Dimensions

A: 8-7/8 "

B: 11-1/2 "

C: 19-3/8 "


Notice to Installer for 84 407:

1. For pole top applications only.
2. Slip fits 3" O.D. poles only.
3. **WARNING:** LEDs are high quality electrical components. Please avoid touching them directly during installation.


84 407 - installation:

1. Route the luminaire wiring through to the pole base and slip luminaire over the top of the pole.
2. Secure luminaire by tightening (4) M8 set screws on pole fitter.
3. Make supply wiring and luminaire wiring connections in base of pole:
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE

Dimming (if applicable):

DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE

4. To adjust beam direction, loosen M10 nut at joint and adjust accordingly (angle adjustable in steps of 10° up to +90°). Tighten joint nut to secure.

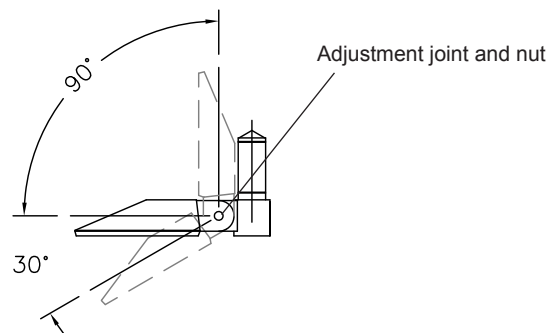
ADJUSTABILITY
Relamping/Maintenance

No relamping required.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

| Description | Part No |
|--------------------|--------------|
| Diffuser | 140627 |
| Driver (120-277V) | 76132-01 |
| LED Module (3000K) | LED-0773/830 |
| LED Module (4000K) | LED-0773/840 |

Lamp: 55.3W LED