


BEGA

Photometric Filename: 22432.IES

TEST: BE3751
TEST LAB: BEGA
DATE: 1/27/2012
LUMINAIRE: 22 432
LAMP: 4.3W LED




Characteristics

IES Classification	Type VS
Longitudinal Classification	Short
Cutoff Classification (deprecated)	Non-Cutoff
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	287
Total Luminaire Efficiency	N.A.
Downward Total Efficiency	N.A.
Luminaire Efficacy Rating (LER)	N.A.
Upward Waste Light Ratio	0.35
Max. Cd.	35.662 (45H, 57.5V)
Max. Cd. (<90 Vert.)	35.662 (45H, 57.5V)
Max. Cd. (At 90 Deg. Vert.)	29.767 (10.4%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	32.134 (11.2%Lum)
Total Luminaire Watts	11
Ballast Factor	1.00
R9 Value	22.80


Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	10.8	N.A.	3.7
FM (30-60)	36.6	N.A.	12.7
FH (60-80)	31.6	N.A.	11.0
FVH(80-90)	14.9	N.A.	5.2
BL (0-30)	10.8	N.A.	3.7
BM (30-60)	36.6	N.A.	12.7
BH (60-80)	31.6	N.A.	11.0
BVH(80-90)	14.9	N.A.	5.2
UL (90-100)	27.4	N.A.	9.5
UH (100-180)	72.2	N.A.	25.1
Total	287.4	N.A.	100.0

BUG Rating B0-U2-G1

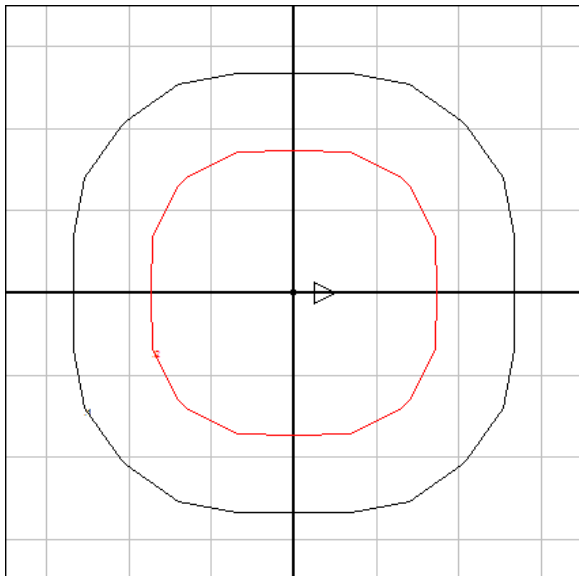

Mounting Height = 8 ft. Grid Spacing = 4 ft.

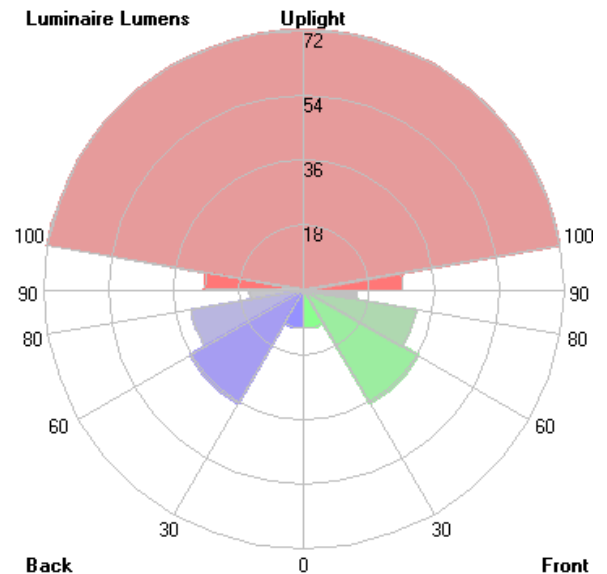

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2015

2/25/2015