


Tools Required:

- 3mm hex head screwdriver
- Phillips head screwdriver
- Adjustable wrench
- 6mm hex head screwdriver

Overview:

LED Watts: 25.6W
System Watts: 32.0W
Controllability: 0-10V, TRIAC, and ELV dimmable
Weight: 10.1 lbs.
Protection Class: IP65



Dimensions


- A: 8-1/4
B: 12-3/8
C: 5-1/4
D: 5-1/8



Notice to Installer:

1. See page 2 for specific product safety warnings.
2. In conformance with UL Standard 1598, a silicone based sealant must be used between luminaire and supporting surface.
3. Luminaire mounts directly to standard recessed 4" octagonal wiring (by others), using mounting plate provided.

Figure 1:

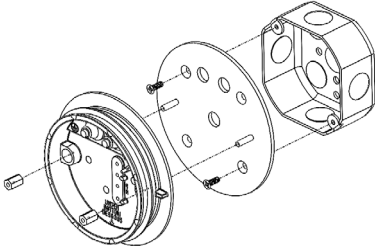

Installation: Luminaire

1. Loosen the (1) 3mm hex head set screw on the fixture canopy to remove luminaire base.
2. Feed luminaire wiring through the luminaire base and mounting plate into wiring box (by others).
3. Make supply wiring and luminaire wiring connections inside the wiring box:
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
Dimming (if applicable):
DIMMING CONTROL WIRE (+) TO POSITIVE DIM LUMINAIRE WIRE
DIMMING CONTROL WIRE (-) TO NEGATIVE DIM LUMINAIRE WIRE
4. Attach provided mounting plate directly to a 4" standard octagonal wiring box using the (2) phillips head screws (provided).
5. **Important!** Place a small bead of silicone around the back side of the mounting plate that will come in contact with the finished surface (exterior applications only). Failure to do so can cause water entry and will void warranty.
6. Place luminaire base over the mounting plate. Tighten nuts (provided) on the studs to secure. (Figure 1)
7. Ensure stainless steel safety cable is connected between luminaire canopy and luminaire base.
8. Replace luminaire canopy (with luminaire attached) and align to desired orientation. Tighten (1) 3mm hex head set screw to secure into place.
9. To adjust head angle, use 6mm hex head screwdriver to loosen screw at aiming joint. Aim luminaire head as needed and tighten screw to secure into place.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

- | | |
|-------------------|--------|
| 180° Glare shield | 71 121 |
| 360° Glare shield | 79 831 |

Maintenance:

Clean regularly with solvent-free cleaner removing dirt and debris. Do not use high pressure cleaners.

Replacement Parts

See label inside of fixture for LED replacement part number.
Consult factory for all other replacement components.

Product Safety Warnings:

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR MOUNTING WITHIN 1.2 m (4 ft) OF THE GROUND.
SUITABLE FOR WET LOCATIONS.
MIN 60°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. PEUT ÊTRE INSTALLÉ À MOINS DE 1,2 m (4 pi) DU SOL.
CONVIENT AUX EMPLACEMENTS MOUILLÉS.
LES FILS D'ALIMENTATION 60°C MIN.**