


**Tools Required:**

4mm hex key  
11/32" Nut driver  
Phillips medium screwdriver


**Dimensions**

**A:** 6-1/4 "

**B:** 6-1/4 "

**C:** 8-1/4 "



**Protection Class:** IP65

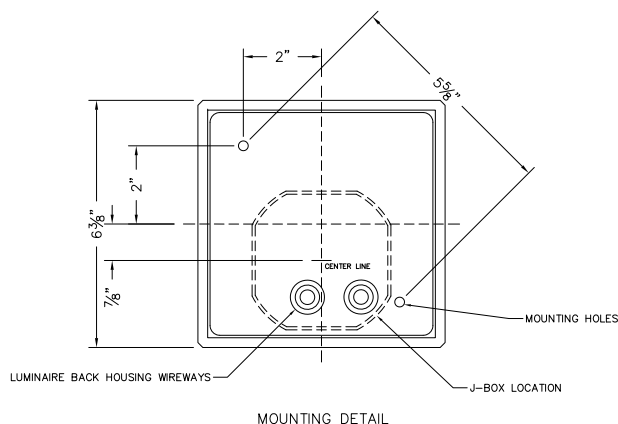
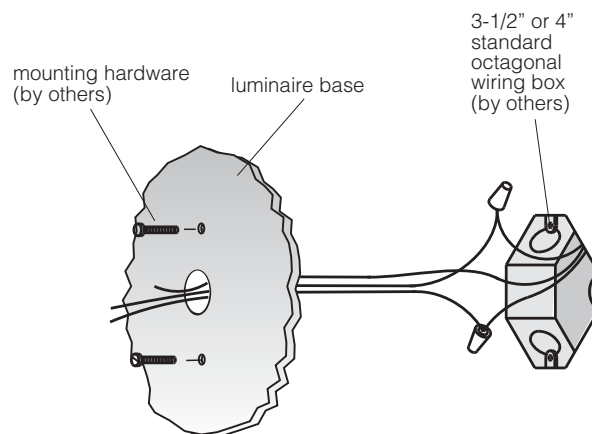
**Weight:** 6.61 lbs.

**Notice to Installer for 22 453:**

1. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
2. Mounts directly to wall over standard octagonal 4" wiring box (by others).
3. Integral LED module and driver provided by BEGA within luminaire housing.

**22 453 - installation:**

1. Loosen (2) 4mm housing hex screws and remove outer casting and lens.
2. Make supply wiring and luminaire wiring connections in the wiring box:  
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE  
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE  
Dimming (if applicable):  
DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE  
DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
3. Place a small bead of silicone around the back side of the luminaire base that will come in contact with the finished wall (exterior applications only).
4. Attach the housing directly to the wall over a 4" standard octagonal wiring box using hardware (by others) see Figures for details.
5. Replace outer casting and glass and tighten (2) screws, making sure the gasket is seated properly.


**Relamping/Maintenance**

No relamping required.

**Accessories**

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

**Replacement Parts**

Description	Part No
Lens	11266511
Lens gasket	83001831
LED Driver	76066
LED Module (3000K)	LED-0263/830
LED Module (4000K)	LED-0263/840

**Lamp:** 3.9W LED

## Product Safety Warnings:

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.**

**MIN 90° SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.**

**CONVIENT AUX EMPLACEMENTS MOUILLÉS.**

**LES FILS D'ALIMENTATION 90°C MIN.**

---