


BEGA

Photometric Filename: 22458.IES

TEST: N/A
TEST LAB: BEGA
DATE: 08/07/2015
LUMINAIRE: 22458
LAMP: 50.4W LED

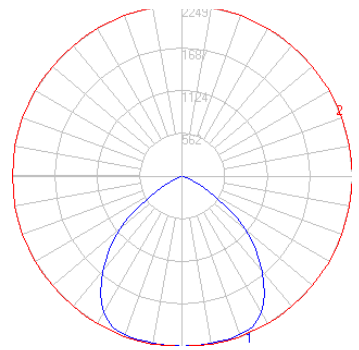


Characteristics

IES Classification	Type VS
Longitudinal Classification	Very Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	4849
Downward Total Efficiency	N.A.
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	85
Total Luminaire Watts	57
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Max. Cd.	2248.8 (90H, 0V)
Max. Cd. (<90 Vert.)	2248.8 (90H, 0V)
Max. Cd. (At 90 Deg. Vert.)	0 (0.0%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	5.9 (0.1%Lum)
Cutoff Classification (deprecated)	N.A. (absolute)


Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	903.7	N.A.	18.6
FM (30-60)	1419.7	N.A.	29.3
FH (60-80)	100.3	N.A.	2.1
FVH(80-90)	0.7	N.A.	0.0
BL (0-30)	903.7	N.A.	18.6
BM (30-60)	1419.7	N.A.	29.3
BH (60-80)	100.3	N.A.	2.1
BVH(80-90)	0.7	N.A.	0.0
UL (90-100)	0.0	N.A.	0.0
UH (100-180)	0.0	N.A.	0.0
Total	4848.8	N.A.	100.0

BUG Rating B2-U0-G0

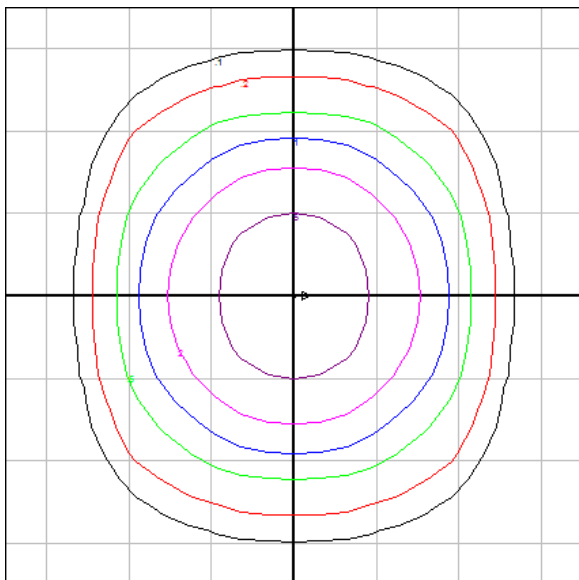

Mounting Height = 15 ft. Grid Spacing = 10 ft.

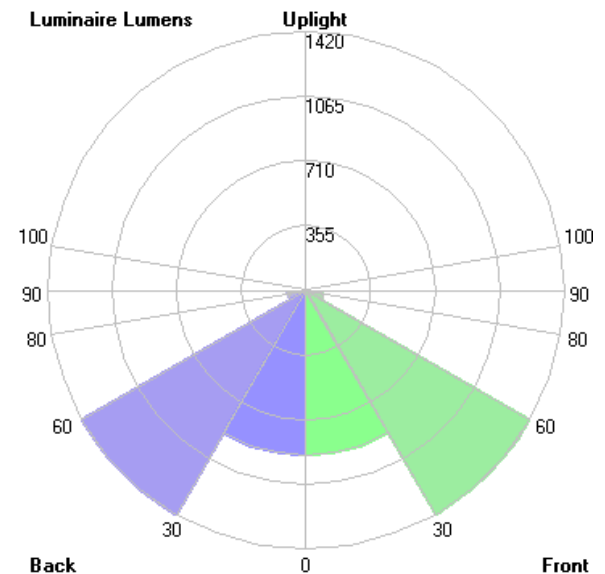

NOTE: Iso-template shows ceiling illumination

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2015

11/11/2015