


Tools Required:

- 4mm hex head screwdriver


Overview:

LED Watts: 37.0W
 System Watts: 44.0W
 Controllability: DALI-D4i
 Weight: 10.1 lbs.
 Protection Class: IP65



Dimensions

A: 13"
B: 15-3/8"

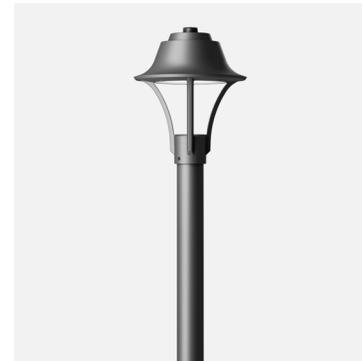

Notice to Installer:

1. See page 2 for specific product safety warnings.
2. For pole top applications only.
3. Slip fits over 3" O.D. poles only.
4. Tighten (4) 4mm hex head set screws to 8.85 ft-lb (12Nm)
5. Pole top is provided with 25' cable to route through the pole.
6. DO NOT open pole top during installation.
7. Luminaire is provided with Zhaga Book 18 Ed. 3.0 interface for use with BEGA Zhaga Air Connector part 71210, sold separately.

85196 Luminaire Installation:

1. Route cable supplied with the luminaire through the pole.
2. Slip luminaire over the top of the pole or tenon, ensure wires are not pinched.
3. Aim luminaire to desired orientation.
4. Secure luminaire to pole by evenly tightening (4) 4mm set screws.
5. Make supply wiring connections in the base of the pole:
 MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
 GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
6. Remove protective cap from Zhaga interface to install BEGA Zhaga Air Connector 71210, sold separately.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Maintenance:

Clean regularly with solvent-free cleaner removing dirt and debris. Do not use high pressure cleaners.

Replacement Parts

See label inside of fixture for LED replacement part number.
 Consult factory for all other replacement components.

Product Safety Warnings:

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.
CAUTION - RISK OF SHOCK - DISCONNECT FROM POWER BEFORE SERVICING
INSTALL PHOTOCONTROL OR SHORTING PLUG
MIN 60°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.
ATTENTION — RISQUE DE CHOC - COUPER L'ALIMENTATION AVANT L'ENTRETIEN
INSTALLER UNE CELLULE PHOTOÉLECTRIQUE OU UNE PRISE COURT-CIRCUITANTE
LES FILS D'ALIMENTATION 60°C MIN.**