

Application

Impact-resistant ceiling and wall luminaire with unshielded light distribution and safety guard. Arranged individually or in groups, they are great design elements for a host of lighting applications.

Materials

- Pressed crystal glass with white ceramic coating on one side
- Die-cast aluminum
- Marine grade, copper free (≤0.3% copper content) A360.0 aluminum alloy
- High temperature silicone gasket
- Mechanically captive stainless steel fasteners
- Galvanized zinc-plated mounting bracket

NRTL listed to North American Standards, suitable for wet locations
Protection class IP 65

Weight: 3.1 lbs.

Electrical

Operating voltage	120-277VAC
Minimum start temperature	-30° C
LED module wattage	8.4 W
System wattage	11.0 W
Controllability	0-10V dimmable
Color rendering index	Ra > 80
Luminaire lumens	561 lm
LED service life (L70)	60000 hrs

LED color temperature

- 4000K (K4)
- 3500K (K35)
- 3000K (K3)
- 2700K (K27)

BEGA can supply you with suitable LED replacement modules for up to 20 years after the purchase of LED luminaires - see website for details

Finish

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish provides superior fade protection in Black, Bronze, and Silver. BEGA standard White is a super durable polyester powder. Optionally available RAL, custom, and premium colors provided in polyester powder and/or liquid paint.

Available colors

Black (BLK)	Bronze (BRZ)
Silver (SLV)	White (WHT)
Natural Bronze (NTB)	RAL:
CUS:	

Type:


BEGA Product:

Project:

Modified:

Available options

CUS	Custom finish
FSC	Fusing
MGU	Marine grade undercoat
NTB	Natural bronze (premium finish)
PCD	Polycarbonate diffuser
RAL	RAL finish
SWBC	Surface wiring box cover

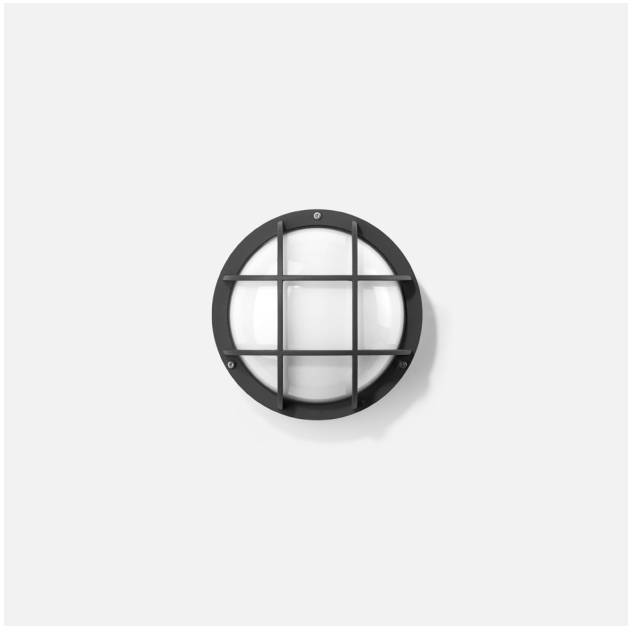

Impact-resistant ceiling and wall luminaire · Unshielded

	LED	A	B
B22463	8.4 W	8	4 ⁵ / ₈