


Tools Required:

- 3mm hex key
- 4mm hex key
- 1/4" masonry/concrete drill bit
- Drill

Protection Class: IP65

Weight: 9.0 lbs.



Dimensions

- A:** 6-3/8 "
- B:** 31-1/2 "
- C:** 4-3/8 "




Notice to Installer for 99 554:

1. See page 2 for specific product safety warnings.
2. Fixture may be damaged if connected to conduit systems that contain water. Article 300-5G of the National Electric Code requires that "Conduits or raceways through which moisture may contact energized live parts shall be sealed or plugged at either or both ends."
3. It is recommended that when installing in planting areas the base of the pillar be slightly elevated to avoid prolonged submerging during heavy rains.
4. Wet location listing does not imply suitability for exposure to standing water for long periods of time.
5. 79 824 anchorage kit is installed AFTER concrete pouring. There is no anchorage installation required during concrete pouring.


79 824 anchorage installation:

1. Provide means to bring supply wiring to the pillar in accordance with local code and pour concrete for finished grade. The pillar mounting plate has a 1 1/2" conduit hole for conduit entry.
2. Loosen set screw at pillar base and remove mounting plate.
3. After establishing finished grade, mark the location of the (3) anchorage drill holes using the mounting plate of the fixture as a template.
4. Drill (3) 1/4" holes in concrete at the marked locations.
5. Align mounting plate holes with drill holes.
6. Drive the sleeve anchors through the mounting plate and into the drilled holes until seated flush.

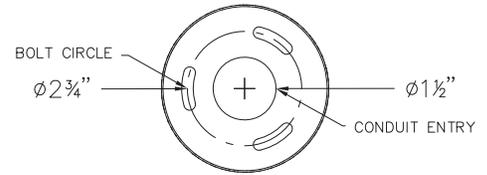

99 554 - installation:

1. Feed luminaire wires through mounting plate and conduit, if necessary.
2. Make supply wiring and luminaire wiring connections in the wiring box:
 MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
 GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
 Dimming (if applicable):
 DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
 DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
3. Mount luminaire over mounting plate and tighten set screw on canopy to secure.

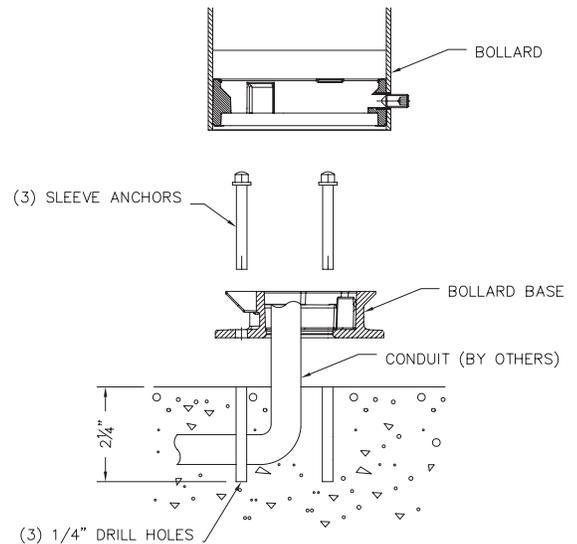

Relamping/Maintenance

Loosen (4) faceplate screws and remove faceplate with reflector. Clean luminaire and faceplate assembly using only solvent-free cleansers. Replace faceplate and tighten (4) screws evenly.

Lamp: 6.3W LED

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Anchor Kit 79 824

Replacement Parts

Description	Part No
Lens (consult factory)	140542
LED driver (120-277V)	76023
LED module (3000K)	LED-0490/830
LED module (4000K)	LED-0490/840

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.

MIN 60°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 60°C MIN.
