


BEGA

Photometric Filename: 22750.IES

TEST: BE_22750
TEST LAB: BEGA
DATE: 12/11/2017
LUMINAIRE: 22 750
LAMP: 3.9W LED

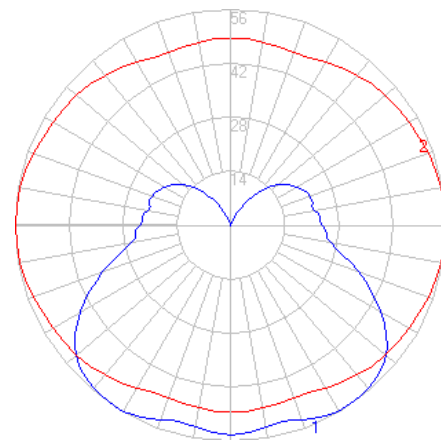


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	320
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	64
Total Luminaire Watts	5
Ballast Factor	1.00
CIE Type	Semi-Direct
Spacing Criterion (0-180)	1.58
Spacing Criterion (90-270)	1.36
Spacing Criterion (Diagonal)	1.66
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.26 ft
Luminous Width (90-270)	0.56 ft
Luminous Height	0.11 ft

Zonal Lumen Summary

Zone	Lumens
0-10	5.14
10-20	14.83
20-30	24.04
30-40	32.25
40-50	38.08
50-60	39.96
60-70	36.47
70-80	28.76
80-90	22.45
90-100	20.40
100-110	18.91
110-120	16.25
120-130	11.89
130-140	6.98
140-150	2.95
150-160	0.61
160-170	0.01
170-180	0.00

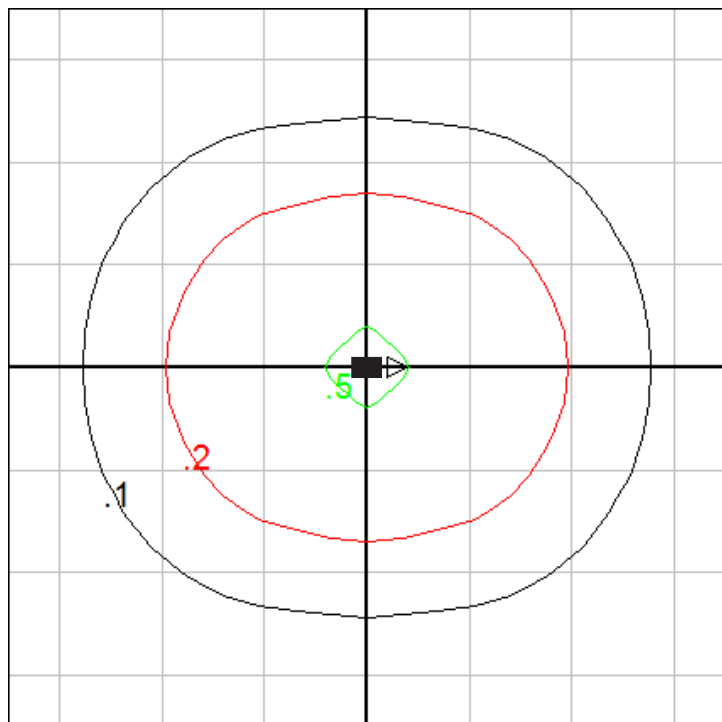

Ceiling mount - Isofootcandle grid on floor
Mounting Height = 10 ft. Grid Spacing = 5 ft.

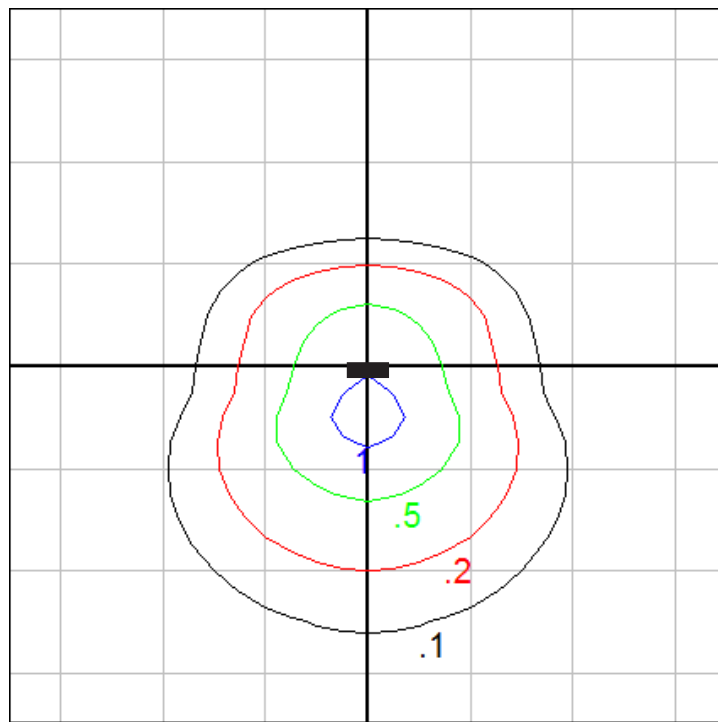

Wall mount - Isofootcandle grid on floor
Mounting Height = 5 ft. Grid Spacing = 5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

7/25/2018