


Tools Required:

- 2mm hex key
- Flat head screw driver medium
- Phillips head screw driver medium



Dimensions

- A:** 6-7/8 "
- B:** 3-3/4 "
- C:** 2-3/8 "




Protection Class: IP64
Weight: 1.5 lbs

Notice to Installer for 22 261:

1. See page 2 for specific product safety warnings.
2. For downlight applications only.
3. Mounts directly to standard recessed 4" wiring box (by others) using mounting kit provided.
4. In conformance with UL Standard 1598, a silicone based sealant must be used between luminaire and supporting wall.

22 261 - installation:

1. Remove luminaire mounting plate by loosening (2) 3mm set screws on rear canopy of fixture.
2. Feed luminaire wires through back of luminaire mounting plate.
3. Make supply wiring and luminaire wiring connections in recessed wiring box:
 MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
 GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
 Dimming (if applicable):
 DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
 DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
4. Attach mounting strap (provided) to wiring box using outlet box screws (by others).
5. Place a small bead of silicone around the back side of the luminaire base that will come in contact with the finished wall (exterior applications only).
6. Attach luminaire base to mounting strap using (2) 8-32 mounting screws and hex nuts provided.
7. Mount luminaire to luminaire base, making sure orientation label is aimed correctly. Tighten 3mm set screws to secure.

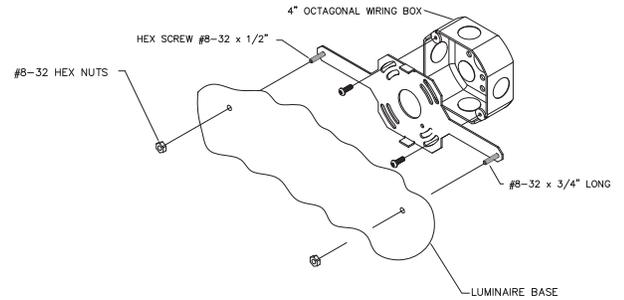

Relamping/Maintenance

No relamping required.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

| Description | Part No |
|--------------------|--------------|
| Face Plate | FP2261 |
| Driver (120-277V) | 76066 |
| LED Module (3000K) | LED-0234/930 |
| LED Module (4000K) | LED-0234/940 |

Lamp: 4.2W LED Module

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.