


BEGA

Photometric Filename: 22794.ies

TEST: BE_22794
TEST LAB: BEGA
DATE: 2/28/2018
LUMINAIRE: 22 794
LAMP: 2W LED, 24V DC

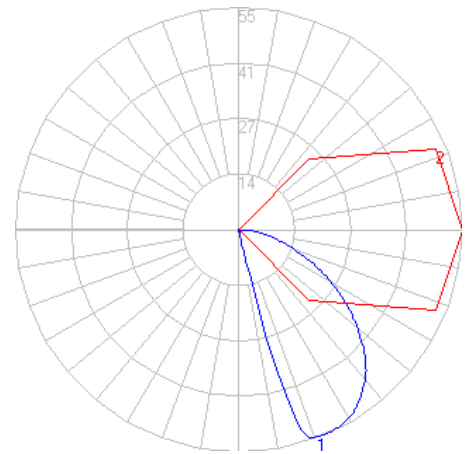


Characteristics

IES Classification	Type II
Longitudinal Classification	Very Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	44
Downward Total Efficiency	N.A.
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	18
Total Luminaire Watts	2.5
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Max. Cd.	54.63 (0H, 24V)
Max. Cd. (<90 Vert.)	54.63 (0H, 24V)
Max. Cd. (At 90 Deg. Vert.)	0 (0.0%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	6.11 (13.9%Lum)
Cutoff Classification (deprecated)	N.A. (absolute)

Lum. Classification System (LCS)


LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	7.3	N.A.	16.5
FM (30-60)	27.2	N.A.	61.6
FH (60-80)	8.8	N.A.	19.9
FVH(80-90)	0.9	N.A.	2.1
BL (0-30)	< 0.05	N.A.	0.0
BM (30-60)	< 0.05	N.A.	0.0
BH (60-80)	< 0.05	N.A.	0.0
BVH(80-90)	0.0	N.A.	0.0
UL (90-100)	0.0	N.A.	0.0
UH (100-180)	0.0	N.A.	0.0
Total	44.2	N.A.	100.0

BUG Rating B0-U0-G0

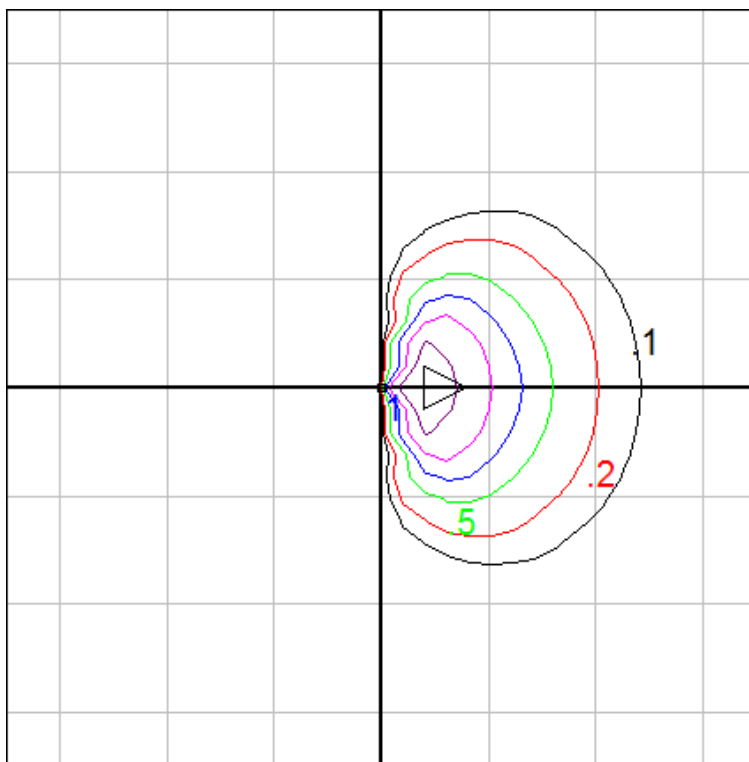

Mounting Height = 2 ft. AFF

Grid Spacing = 2.5 ft.

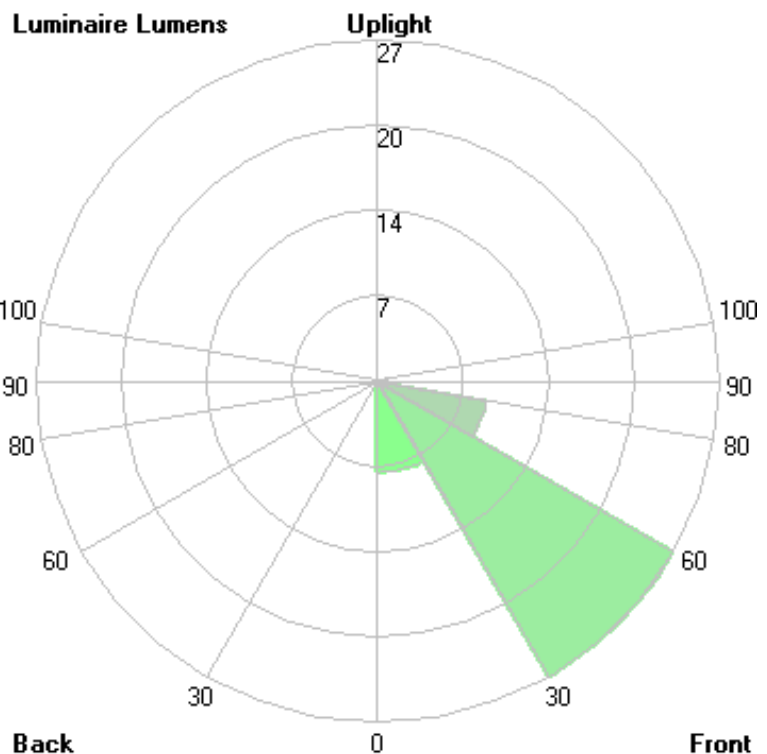

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

2/28/2018