


Tools Required:

- 3mm hex key
- 4mm hex key
- Phillips head screw driver medium

CSA certified to U.S. and Canadian standards.  
Suitable for wet locations.



**Dimensions**  
**A:** 7-7/8"  
**B:** 3-1/2"




**Protection Class:** IP65  
**Weight:** 2.6 lbs.

- Notice to Installer for 22 455:**
- BEGA luminaires may be damaged if connected to conduit systems containing water- Article 300-5G of National Electric Code requires that “Conduits or raceways through which moisture may contact energized live parts shall be sealed or plugged at either or both ends”.**
  - Mounts directly to wall or ceiling to standard recessed 4” wiring box (by others).
  - In conformance with U.L. Standards 1598, a silicone-based sealant **MUST** be used between the mounting plate edge and supporting wall.
  - LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation.

- 22 455 - installation:**
- Loosen (3) 4mm hex screws and remove luminaire top and glass with gasket from the luminaire base.
  - Feed luminaire wires through luminaire base and mounting plate.
  - Make supply wiring and luminaire wiring connections in the octagonal wiring box:  
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE  
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE  
WIRE GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE  
Dimming (if applicable):  
DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE  
DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
  - Attach mounting strap (provided) to wiring box using outlet box screws (by others)
  - Place a small bead of silicone around the back side of the luminaire base that will come in contact with the finished wall (exterior applications only).
  - Secure luminaire base to ceiling or wall surface using hardware by others (minimum thread size 8-32).
  - Tighten (3) 4mm hex screws to secure luminaire top with luminaire base.

Fig. 1

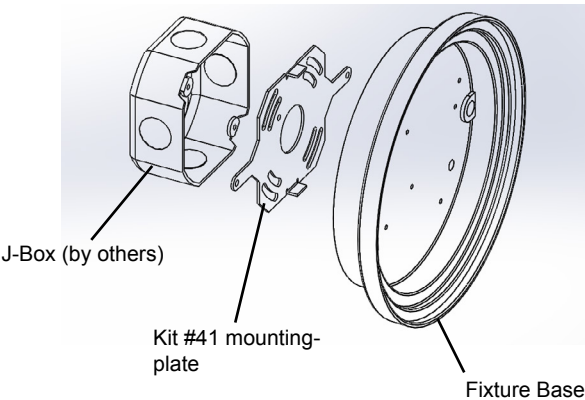

**Relamping/Maintenance**  
No relamping required.

**Lamp:** 8.7W LED

**Accessories**  
Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts	
Description	Part No
Lens	11267511
Lens gasket	830557.1
LED driver (120-277V)	75990
LED module (3000K)	LED-0592/830
LED module (4000K)	LED-0592/840