
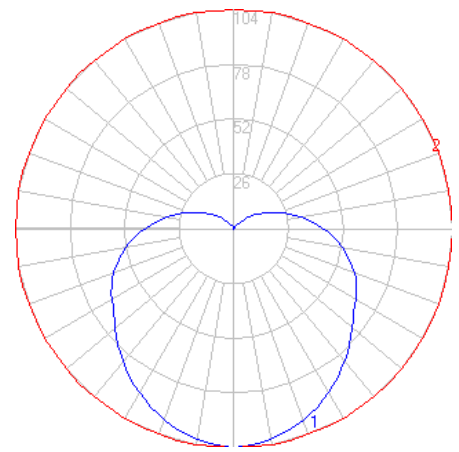


BEGA

Photometric Filename: 22864.IES

TEST: BE_22864
TEST LAB: BEGA
DATE: 12/9/2016
LUMINAIRE: 22 864
LAMP: 3.9W LED

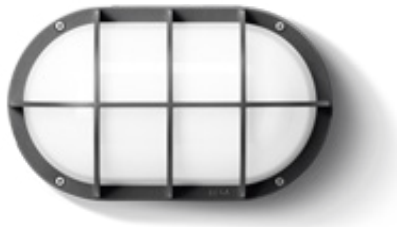


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	417
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	70
Total Luminaire Watts	6
Ballast Factor	1.00
CIE Type	Semi-Direct
Spacing Criterion (0-180)	1.30
Spacing Criterion (90-270)	1.18
Spacing Criterion (Diagonal)	1.36
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.49 ft
Luminous Width (90-270)	0.85 ft
Luminous Height	0.26 ft

Zonal Lumen Summary

Zone	Lumens
0-10	9.76
10-20	27.51
20-30	41.25
30-40	49.87
40-50	53.12
50-60	51.82
60-70	47.72
70-80	41.45
80-90	33.79
90-100	25.56
100-110	17.56
110-120	10.65
120-130	5.26
130-140	1.66
140-150	0.12
150-160	0.00
160-170	0.00
170-180	0.00

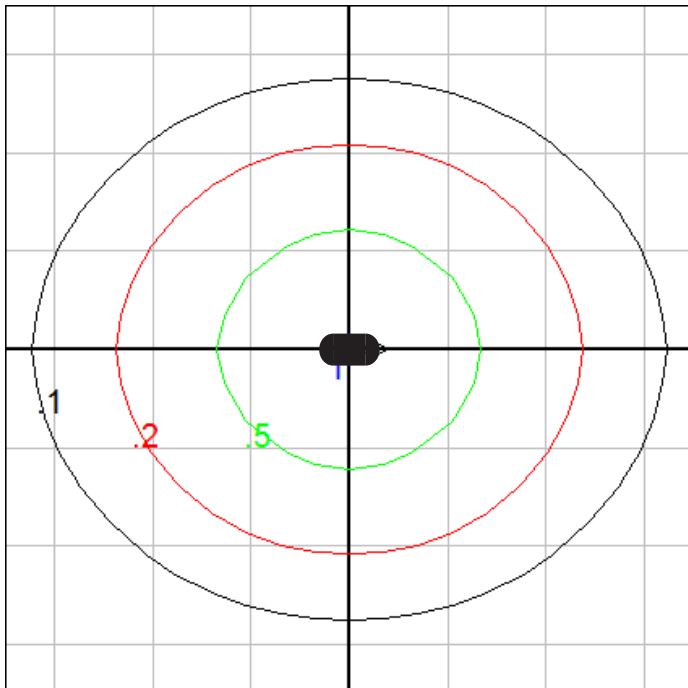

Ceiling Mount - Isofootcandle grid on floor
Mounting Height = 10 ft. Grid Spacing = 5 ft.

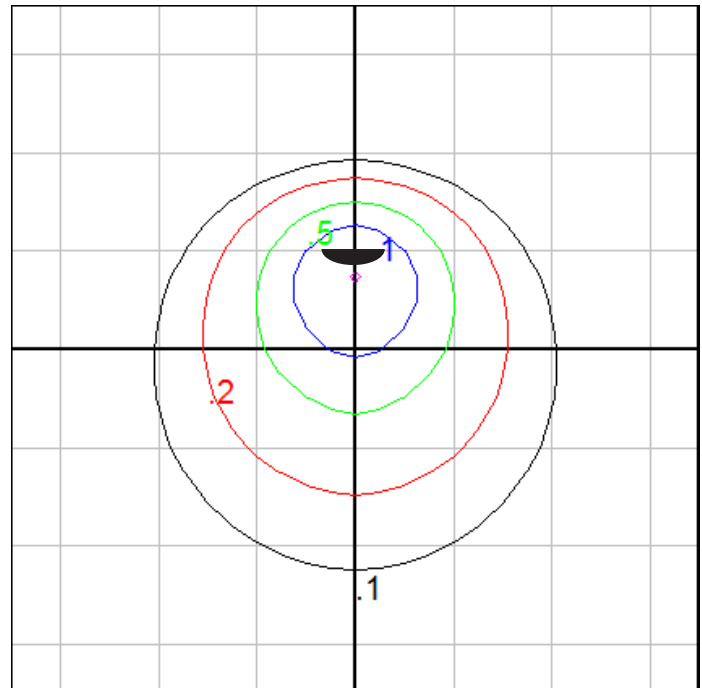

Wall Mount - Isofootcandle grid on floor
Mounting Height = 5 ft. Grid Spacing = 5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

8/6/2018