


Tools Required:

- 4mm hex key
- Phillips head screwdriver medium
- Adjustable wrench

Protection Class: IP 65

Weight: 3.1 lbs.

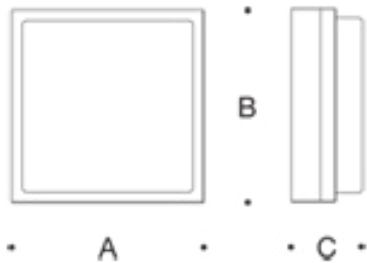

Dimensions

- A: 6-3/4 "
- B: 6-3/4 "
- C: 2-3/4 "




Notice to Installer for 22 663:

- For ceiling and wall applications only.
- Mounts directly to wall OVER a standard octagonal 4" wiring box (by others).
- In conformance with UL Standard 1598, a silicone based sealant must be used between luminaire and supporting wall.
- Integral LED module and driver provided by BEGA within luminaire housing.

Figure 1 (generic image)

22 663 - Installation:

- Unscrew (4) trim screws and remove trim and glass lens.
- Make supply wiring and luminaire wiring connections inside the octagonal wiring box:  
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE  
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE  
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE  
Dimming (if applicable):  
DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER  
DIM CONTROL WIRE  
DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER  
DIM CONTROL WIRE
- Place a small bead of silicone around the back side of the luminaire base that will come in contact with the finished wall (exterior applications only).
- Anchor luminaire base to wall surface using hardware by others.
- Replace trim and glass lens and tighten (4) screws.

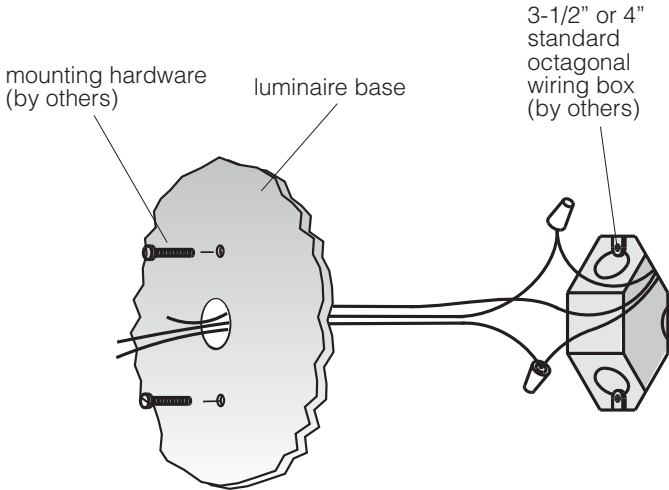

Relamping/Maintenance	Accessories	Replacement Parts	
No relamping required.	Please refer to the appropriate accessory installation sheet for further instruction when applicable.	Description	Part No
Lamp: 2.9W LED		Trim	223234
		Lens	11265311
		Gasket	830684
		LED driver (120-277V)	76023
		LED module (3000K)	LED-0280/930
		LED module (4000K)	LED-0280/940

**Product Safety Warnings:**

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.**

**MIN 90°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.**

**LES FILS D'ALIMENTATION 90°C MIN.**

---