


Tools Required:

- Flat head screw driver medium
- Phillips head screw driver medium



**Dimensions**  
A: 5-5/8 "  
B: 4-1/4 "



Weight: 2.42 lbs.


Notice to Installer for 23 967:

- 1. See page 2 for specific product safety warnings.
- 2. Select the desired trim ring or housing material finish by using appropriate code number as suffix.
  - 23 967.1 - (.1) Brilliant white
  - 23 967.2 - (.2) Stainless steel
  - 23 967.3 - (.3) Polished aluminum
- 3. Mounts directly to standard recessed 4" octagonal wiring box. (Figure 1)
- 4. LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation.

23 967 - installation:

- 1. Remove lens from luminaire housing by unscrewing the lens counter-clockwise.
- 2. Feed luminaire wires through base of luminaire housing.
- 3. Make supply wiring and luminaire wiring connections inside the wiring box:
  - MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
  - NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
  - GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
- Dimming (if applicable):**
  - DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER
  - DIM CONTROL WIRE
  - DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER
  - DIM CONTROL WIRE
- 4. Mount luminaire housing directly to standard recessed 4" octagonal wiring box using hardware provided.
- 5. Replace luminaire lens by screwing into luminaire housing clockwise. Make sure gasket it seated properly.

Figure 1

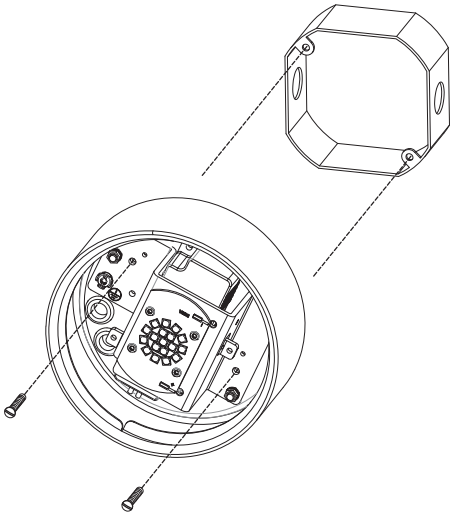

Relamping/Maintenance

Unscrew glass by turning counter-clockwise. Clean glass and luminaire using on solvent-free cleansers. Replace glass, making sure gasket is seated properly.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

Description	Part No
Lens/Gasket	11304540RG
LED driver (120-277V)	75992
LED module (3000K)	LED-0328/930
LED module (4000K)	LED-0328/940

Lamp: 9.6W LED

**Product Safety Warnings:**

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR DAMP LOCATIONS.**

**MIN 90°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS HUMIDES.**

**LES FILS D'ALIMENTATION 90°C MIN.**