


Tools Required:


Overview:

LED Watts: 18.6W
 System Watts: 22.0W
 Controllability: 0-10V dimmable
 Weight: 14.6 lbs.
 Protection Class: IP65



Dimensions

A: 6-1/4"
B: 25-3/8"
C: 7-7/8"

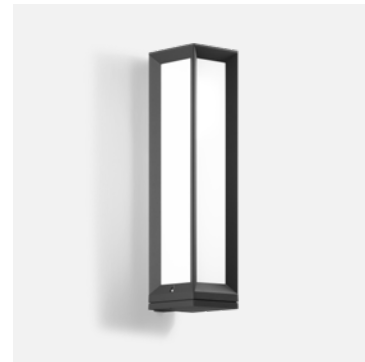

Notice to Installer:

1. See page 2 for specific product safety warnings.
2. For attachment to wall over vertical separate single gang wiring box (by others).
3. Wiring box needs to be recessed into wall and must be flush with the finished surface.
4. In conformance with UL Standard 1598, a silicone based sealant **MUST** be used between luminaire and supporting wall.
5. For wall applications only.
6. Approximately 23" of clearance suggested above luminaire for maintainance.

24506 Installation:

1. Drill (2) mounting screws in wall with 18 1/8" spacing. **[Figure 1]**
2. Loosen the (2) hex screws **[Figure 2]** and remove luminaire top and acrylic lens.
3. Remove (2) LED bracket screws **[Figure 3]** tilt LED mount forward to reveal wiring quick disconnect located on the back bottom portion of the fixture.
4. Remove LED bracket and mount fixture to wall. **[Figure 4]**
5. Feed supply wires through rear opening of luminaire.
6. Make supply wiring and luminaire wiring connections inside the single gang wiring box:


MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
 GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE.

Dimming (if applicable):

DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
 DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE


7. Mount luminaire to wall using hardware by others (minimum screw size 8-32 screws).
8. Re-attach quick connects and replace LED bracket to fixture.
9. Replace lens and cover plate. Tighten (2) hex screws.

Figure 1

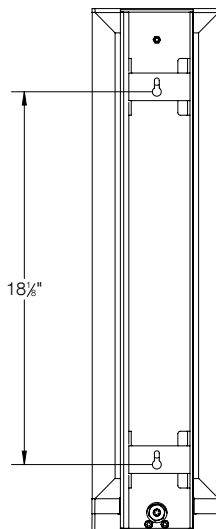


MOUNTING DETAIL

Figure 2

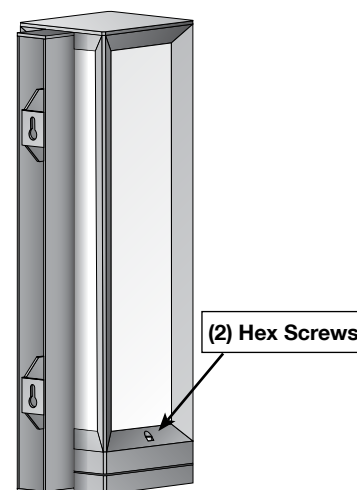


(2) Hex Screws

Figure 3



(2) LED bracket screws
[TOP DOWN VIEW]

Figure 4



LED bracket

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Maintenance:

Clean regularly with solvent-free cleaner removing dirt and debris. Do not use high pressure cleaners.

Replacement Parts

See label inside of fixture for LED replacement part number.

Consult factory for all other replacement components.

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS. MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.