

Tools Required:

- T10 Torx head screwdriver
- 2.5mm hex head screwdriver

Overview:

LED Watts: 14.0W
 System Watts: 17.0W
 Controllability: 0-10V dimming down to 1%
 Weight: 2.2 lbs.
 Protection Class: IP65

Notice to Installer:

1. See page 2 for specific product safety warnings.
2. Luminaire is non-IC rated. Insulation must be at least 3" from luminaire.
3. Luminaire is not suitable for poured concrete construction.
4. Rough-in kit ceiling pan with integral driver and hanging brackets, part number CP24721. 12" whip provided to connect fixture to ceiling box via quick disconnect.
5. Hanger brackets are adjustable between 16" and 24".
6. Required ceiling cutout is 5 - 1/4".
7. Minimum ceiling thickness is 1/2". If thinner material is being used, the back of the ceiling cladding must be reinforced where the mounting claws from the fixture will connect with the ceiling material.
8. Maximum ceiling thickness is 1-1/2"

WARNING: Do not remove plastic cover from face of luminaire until installation is fully complete. The Ultradark painted surfaces should not be handled directly if possible to avoid damage to the structural coating. If touching is unavoidable, use powder free latex/nitrile gloves.

Ceiling Pan Installation:

1. Measure distance between available ceiling studs.
2. Attach bar hanger brackets to ceiling pan by aligning vertically and tightening (1) flat head bar hanger screw. See Figure 1.
3. Fit bar hangers to appropriate length between ceiling studs. Ensure ceiling pan is level and nail brackets to ceiling studs. For attachment to t-bar type ceilings, bar hanger brackets can be attached to Caddy Fasteners (not included).
4. Bring supply wires to junction box on ceiling pan and make connections to driver wires:

SUPPLY WIRING CONNECTIONS:

MAIN VOLTAGE (HOT) SUPPLY WIRE TO BLACK DRIVER WIRE
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE DRIVER WIRE
 GREEN (GROUND) WIRE TO GREEN DRIVER WIRE

0-10V DIMMING (IF APPLICABLE):

DIM CONTROL (+) TO POSITIVE DRIVER DIM CONTROL WIRE
 DIM CONTROL (-) TO NEGATIVE DRIVER DIM CONTROL WIRE

Installation Luminaire:

1. Connect the fixture to the ceiling pan via the quick disconnect.
2. To install fixture, remove faceplate by loosening (1) 2.5mm hex head screw located on side of faceplate. Rotate faceplate counter-clockwise to remove. See Figure 2.
3. Ensure mounting claws are set to top most position and are turned in towards fixture. Mounting claws are raised and lowered via (2) T10 Torx head screws located under faceplate.
4. Push luminaire up into ceiling opening and tighten (2) T10 Torx head screws to secure luminaire into place.
 Caution: **Tighten screws evenly by hand, do not use power tools!**
5. Replace faceplate. Align grooves in faceplate with notches in fixture housing, rotate faceplate clockwise and then tighten (1) 2.5mm hex head screw to secure faceplate into place. See Figure 2.
6. Once fixture is fully installed, remove plastic cover, taking care not to touch the Ultradark coating.

NOTE: It is highly recommended that the plastic cover remains in place until construction is complete to protect the Ultradark surface from excess dust and debris common with active construction environments.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.


Maintenance:

Contact with the inner surface of the luminaire reflector should be avoided in order protect the light absorbing properties of the ultra-black coating.

Replacement Parts

See label inside of fixture for LED replacement part number.

Consult factory for all other replacement components.



Dimensions

A: 5-3/4"
 B: 1/4"
 C: 4-1/2"
 D: 18"

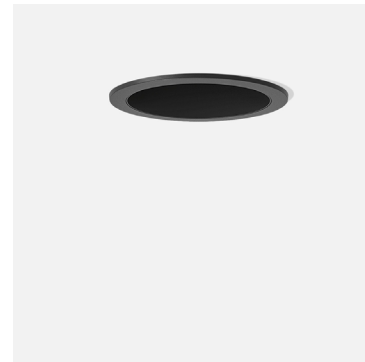


Figure 1:


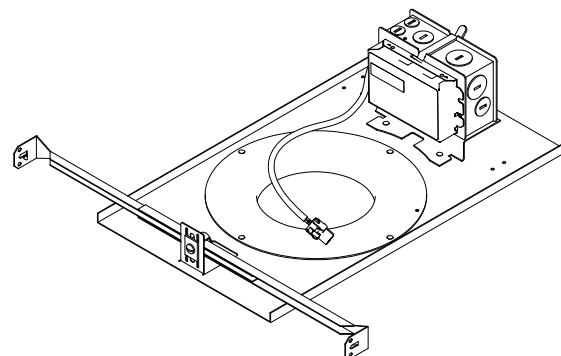


Figure 2:

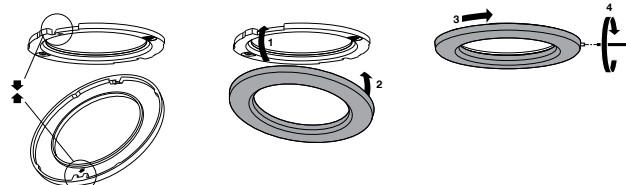

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

MAXIMUM OF 8-12 AWG THROUGH BRANCH CIRCUIT CONDUCTOR SUITABLE FOR 90°C PERMITTED IN BOX.

MIN 90° SUPPLY CONNECTIONS.

SUITABLE FOR WET LOCATIONS. COVERED CEILING MOUNT ONLY.

DO NOT INSTALL INSULATION WITHIN 76 mm (3 in) OF ANY PART OF THE LUMINAIRE

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.

UN MAXIMUM DE 8 CONDUCTEURS DEDÉRIVATION 12 AWG CONVENANT POUR 90°C SONT PERMIS DANS UNE BOÎTE.

LES FILS D'ALIMENTATION 90°C MIN.

CONVIENT AUX EMPLACEMENTS MOUILLÉS. INSTALLATION SUR PLAFOND COUVERT SEULEMENT

NE PAS METTRE L'ISOLANT À MOINS DE 76 mm (3 po) DE TOUTE PARTIE DU LUMINAIRE